
High-Pressure Hydraulics CATALOG

WIMMER PUMPS

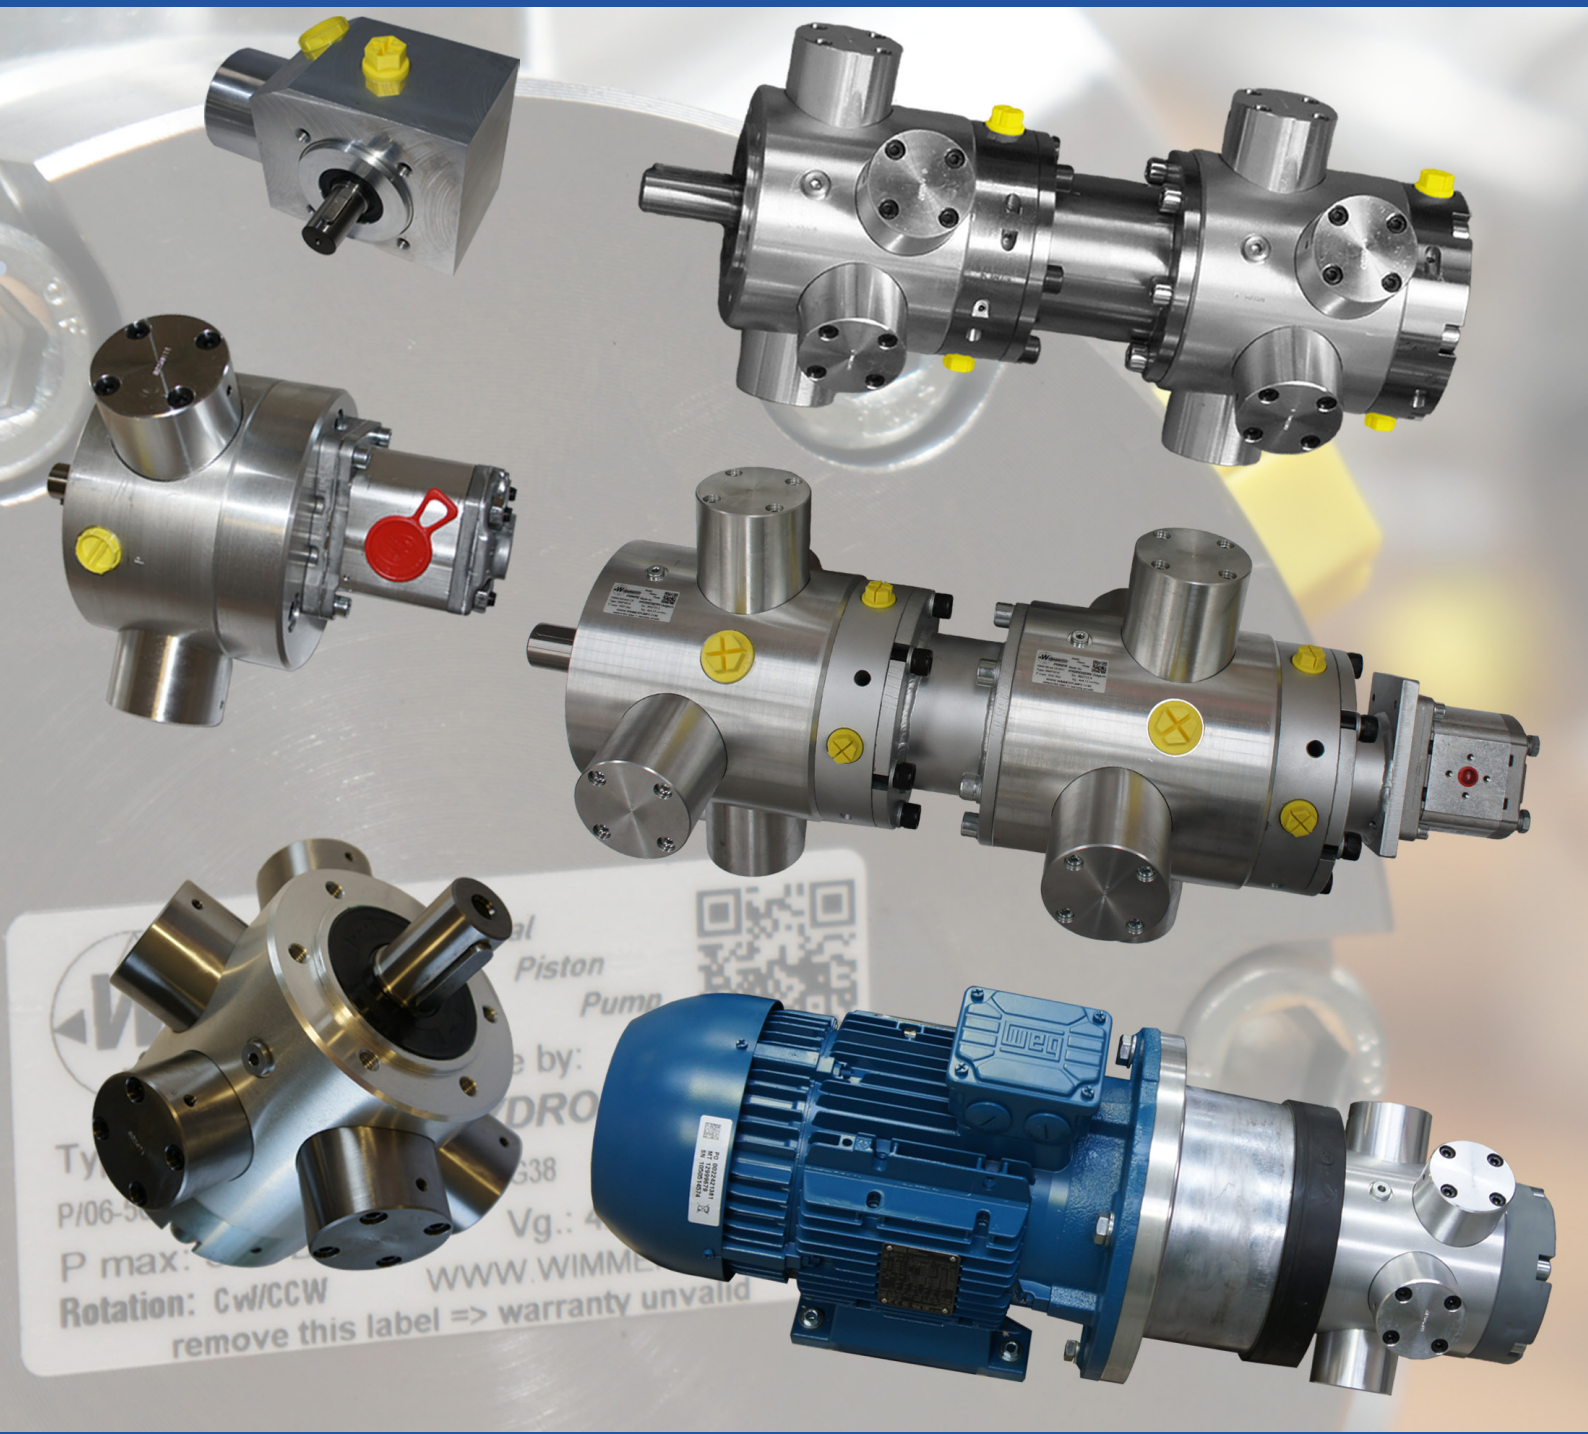

- Radial Piston Pumps
- Twin-, Multiple-, Multiple Circulation and HP/LP Pumps
- Motor Pumps
- Hydraulic Aggregates
- Customized Solutions

Table of contents

1. General information pag. 4
- 1.1 Design
- 1.2 Operating data

2. Overview pag. 7
- 2.1 Standard pumps
- 2.2 Type designation

3. Combination pumps pag. 10
- 3.1 Gear pumps (for HP/LP-Combination pumps)
  - 3.1.1 Delivery volume 1,1 – 8.0 cm³/rev (Size 1)
  - 3.1.2 Delivery volume 4.5 – 28.2 cm³/rev (Size 2)
  - 3.1.3 Delivery volume 22 – 91 cm³/rev (Size 3)
- 3.2 Multiple circulation pumps, twin pumps and special pump capacities

4. Sub-oil motor pumps pag. 13
- 4.1 General information
- 4.2 Overview radial piston pumps
- 4.3 Overview sub-oil motors

5. Aggregates pag. 16

6. Data Sheets pag. 17
- 6.1 Radial piston pumps (standard pumps)
- 6.2 Radial piston pumps with second shaft end
- 6.3 Gear pumps

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

Radial piston pumps

Constant Pumps

Valve controlled on pressure and suction side

Standard pumps from:

0.3 to 5,5 l/min @ 1500 RPM (11,11 l/min @ 3000 RPM) up to 1000 Bar
0.3 to 9,9 l/min @ 1500 RPM (19,70 l/min @ 3000 RPM) up to 700 Bar
0.3 to 49,78 l/min @ 1500 RPM (73,01 l/min @ 2200 RPM) up to 500 Bar

- 3 sizes (groups)
- Up to 6 pistons per single pump or up to 12 pistons per twin pump;
- Possible piston diameters 6, 8, 9, 10, 12, 16, 19 und 22 mm
- Within one size (group) the pump elements can be replaced and mixed optionally
- Self-priming and under most operating conditions self-venting (manual venting and filling is possible with the integrated air discharge port)
- Above-average service life
- Friendly design – pump elements can be replaced without having to dismantle the pump
- Can also be used for biological degradable hydraulic oils or hydraulic liquids which are virtually non-flammable

Twin-, Multiple-, Multiple Circulation- and HP/LP-Pumps:

- HP/LP combination pumps (Almost all pumps are deliverable with a flange mounted gear pump)
- Twin- or multiple pumps
- Multiple circulation pumps (several pressure connections per pump possible)
- Attachment of pumps of other makes possible

Motor pumps:

- With pumping support and coupling for separate installation from oil container or for “conventional” container design
- With sub-oil motor for installation of pump and motor inside an oil container
- Radial piston pumps which fit partly for high revolution speed (e.g. diesel engine, 2-pole electric motor etc.)

Hydraulic aggregates:

- Ready to connect
- With / without electric motor
- With / without accessories

Customized solutions:

- We check all customers requests carefully and work out tailor-made solutions (3D-CAD-system Pro/Engineer is available)
- On account of the know-how of our production and assembly departments and the existing production equipment, we can provide everything from individual components to complete systems

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

1. GENERAL INFORMATION

WIMMER radial piston pumps are hydraulic pumps with a constant volumetric output. The pumps are usually used to supply hydraulic systems with pressure oil. **WIMMER** 's range of pumps includes simple pumps with one to six pistons and twin pumps with up to 12 pistons. Most pumps are available with flange mounted gear pumps (HP/LP - pumps). In the case of pumps with multiple pistons, it is possible to have on to six pressure outlets from one pump depending on the number of pump pistons.


For the installation of a motor pump unit into a oil container the **WIMMER** pumps can be delivered with a completely mounted sub-oil motor.

The radial piston pumps are controlled by valves and the pistons are arranged to be either opposite the housing or arranged in a star shape (180° to 60° depending on the number of pistons). Depending on the model, one to six pistons are driven by an eccentric bearing. The eccentric bearing rolls off the piston floor if the pressure stroke is under a high load, if there is no load on the intake stroke, it glides. The pistons are returned by springs.

The delivery flows of the individual pump elements are brought together in the pump housing and join up in one or more axial or radial pressure connections as required. Oil is ingested through the pump housing which guarantees permanent lubrication and cooling of all moving parts.


Due to the optimised weight of the design the pump housing is made of high-strength light metal. To ensure that maintenance is kept to a minimum and that the service life of WIMMER radial piston pumps is well above average, the bearings are generously dimensioned and all wearing parts such as eccentric shaft, pistons and valve unit, are specially hardened and polished.

Kinematic viscosities - ν Speed n

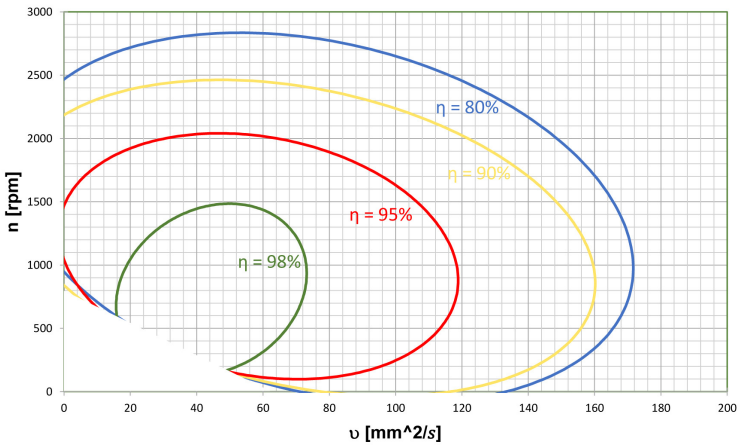

Speed - kinematic viscosity - volumetric flow rate

1.1 Design

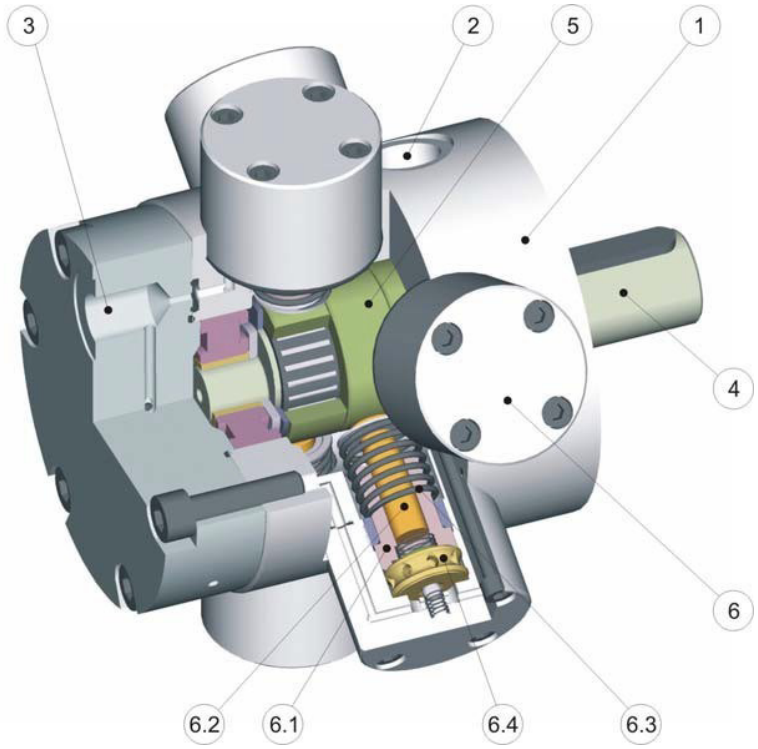

Sectional model of a 6-cylinder pump

1.Housing

2. Intake connection

3. Pressure connection

4. Eccentric shaft (with rolling bearings and sliding bearings respectiveley, depending on the type of pumps)

5. Support roller with eccentric bearing for pressure stroke (with rolling bearings and respectively, depending on the type of pumps)

6. Pump element (can be replaced easily by loosening the four hexagon socket head screws) consists mainly of:

- 6.1. piston guide
- 6.2. piston
- 6.3. piston spring for the intake stroke
- 6.4. valve assembly with intake pressure valve

!! Internal parts of the pump elements are not available separately

1.2 Operating Data

Design:	radial piston pump with constant output
Type designation:	type identification see sect. 2.1
Attachment:	standard: at the front side
Drive:	via elastic coupling; direction of rotation as required (for HP/ LP – combination pumps it must be the same as the direction of rotation of the gear pump)
Speed range:	100 - 3000 rpm , depending on the type *(All pumps are tested and run-in up to 1500 rpm, higher speeds on request or according to run-in procedure.)*
Operating Pressure:	up to 1000 bar; see overview sect. 2.1
Delivery volume:	0.21 - 33.19 cm³/rev (0.1 - 73 l/min; see overview sect. 2.1 calculating guide value of delivery volume: **Qth= Vg * n * ηVol** Qth : Delivery flow theorecically [l/min] Vg: displacement [cm³/rev] n: revolution speed [rpm] ηVol: volumetric efficiency up to ≈ 0.98 any; equipment dimensions see sect. 6
Installation position:	all pumps are under normal operating conditions self-priming, exept PPZ-serie (also see the operating regulations).
Suction height:	During operation, the level of oil can be lowered up to 1000 mm depending on the type of pump.
Oils to be used:	Hydraulic oils with a kinematic viscosity [cSt] of 10 – 220 mm²/s (HP/ LP – combination pumps of 20 - 200 mm²/s); pay attention to the start viscosities; in addition biologically reducible hydraulic oils, virtually non-flammable hydraulic liquids and diesel fuel can be pumped (further information upon request).
Temperature range:	Oil and surroundings (-40°) -20° / +80°C (pay attention to the start viscosities!)
Power requirement:	Calculation: $PkW = \frac{P * Q_{th} * k}{612 * \eta}$ p: operating pressure [bar] Qth: delivery volume theorecically[l/min] k: factor, depends on the number of pistons k ≈ 2.9 (1 piston), k ≈ 1.4 (2 piston), otherwise k=1 η: Ø overall efficiency ≈ 0.8 ... 0.88

2. OVERVIEW

2.1 Standard Radial Piston Pumps

Max pressures and displacements of the standard program

Size	Housing	Nb of Pistons	Pressure (bar) / displacement (cm³) by piston diameter							
			Ø 6 mm	Ø 8 mm	Ø 9 mm	Ø 10 mm	Ø 12 mm	Ø 16 mm	Ø 19 mm	Ø 22 mm
1	PPZ	1	700/0,21	700/0,37		500/0,57				
		2	700/0,41	700/0,73		500/1,14				
		3	700/0,62	700/1,10		500/1,71				
2	PD	1	700/0,22	700/0,39	700/0,49	700/0,61	700/0,88	500/1,56		
		2	700/0,44	700/0,78	700/0,99	700/1,22	700/1,76	500/3,12		
	PDS	1	1000/0,22	1000/0,39	1000/0,49					
		2	1000/0,44	1000/0,78	1000/0,99					
	PZ	3	700/0,82	700/1,46	700/1,85	500/2,29	500/3,29	250/5,85		
		5	700/1,37	700/2,44	700/3,09	500/3,81	500/5,49	250/9,75		
	PM/P	2	700/0,55	700/0,98	700/1,23	700/1,52	700/2,19	500/3,90		
		3	700/0,82	700/1,46	700/1,85	700/2,29	700/3,29	500/5,85		
		4	700/1,10	700/1,95	700/2,47	700/3,05	700/4,39	500/7,80		
		6	700/1,65	700/2,93	700/3,70	700/4,57	700/6,58	500/11,70		
	PS	2	1000/0,55	1000/98	1000/1,23					
		4	1000/1,10	1000/1,95	1000/2,47					
		6	1000/1,65	1000/2,93	1000/3,70					
3	PW	4							500/16,50	500/22,12
		6							500/24,75	500/33,19

Examples of assemblies:

PPZ/02-700-0,76 = 2 Plungers / 700 Bar / Ø 8mm

PPZ/02-500-0,97 = 2 Plungers / 500 Bar / Ø 8mm + Ø10mm

PZ/05-700-3,18/GP2 = 5 Plungers / 700 Bar / Ø 9mm / for assembly with gear pump size 2

PS/04-1000-1.78/GP1 = 4 Plungers / 1000 Bar / 2x Ø6mm + 2x Ø9mm / for assembly with gear pump size 1

PW/06-500-33.19 = 6 Plungers / 500 Bar / Ø22mm

Type number:

1	2	3	4	5	6	7	8	9	10
PZ/	5	-700	-3,1	F	GP2	D	XXX	F	Sxxx

Pump type
PZ - PD - PDS - PPZ - PM - P - PS - PW

Number of Plungers

max. Pressure
250 Bar
500 Bar
700 Bar
1000 Bar
(** Tabel off max presures and displacements)

Flow cm³ / Rev
for one pressure connection: flow rate of the pump
for more connections: V1 + V2.....+Vn

FPM (seals) - Standard = empty

Drive option (second pump)

Direction of rotation

D	Clockwise
S	Counterclockwise

Gearpump

I	for second Radial piston pump
GP1	for Gear Pump Size1
GP2	for Gear Pump Size2
GP3	for Gear Pump Size3

Ref. of the gearpump for combination pumps

F = Flange or G = Thread

Sxxx = Special concept

w

Examples of assemblies:

PZ05-700-3,09……..= PZ with 5 plungers, 700 Bar, 3,09cm³/rev

P/04-700-2x1.52…….. ……= P with 4 plungers, 700Bar, 2x 1.52 cm³/rev

P/06-500-12,06/GP2……..= P with 6 plungers, 500 Bar, 12,06 cm³/rev, Second drive to gear pump BG2, without gear pump

PW/04-500-16.5/GP2D160F-S-xx……= PW with 4 plungers, 500 Bar, 16.5 cm³/rev and second pump GP2D160F-S-xx (special code)

Note:

- All pumps are also deliverable with different delivery flows.
- All pumps are also deliverable with several pressure connections as well as with different delivery flows (exception: 1-piston pump and type 'PPZ/02').
- Continuous shafts to connect additional pumps are available.
- Further information upon request.

2.2 Type Designation

SYNTAX: ASSEMBLY / number of pistons - operating pressure - displacement (1) [- displacement (2)...] [/ 2. shaft end] [/ special stroke] [- GP-part]

ASSEMBLY/: - can be seen in tables in sect. 2.1

Number of pistons: - number of pistons used (tables sect. 2.1)

Operating pressure: - max. operating pressure [bar] (tables sect. 2.1)

Displacement (1): - displacement [cm³/rev] with one pressure connection (tables sect. 2.1).

The following values are optional for twin pumps, multiple circulation pumps and special outputs:


[- Displacement (2)]: - displacement [cm³/rev] of the second pressure connection, optional (see sect. 3.2).

[/ 2. Shaft end]:
- I : cylindric shaft end
- GP2 : shaft end to directly connect to a gear pump (GP) of size „GP2D...F“
- GP1 : shaft end to directly connect to a GP „GP1P…G“

/ Special stroke]: - height of stroke [mm] see information in sect. 3.2 (not Standard)

[/ GP - part]: - high-pressure/low-pressure pumps (HP/LP pumps) LP-syntax to be specified (see sect. 4.1)

Example:

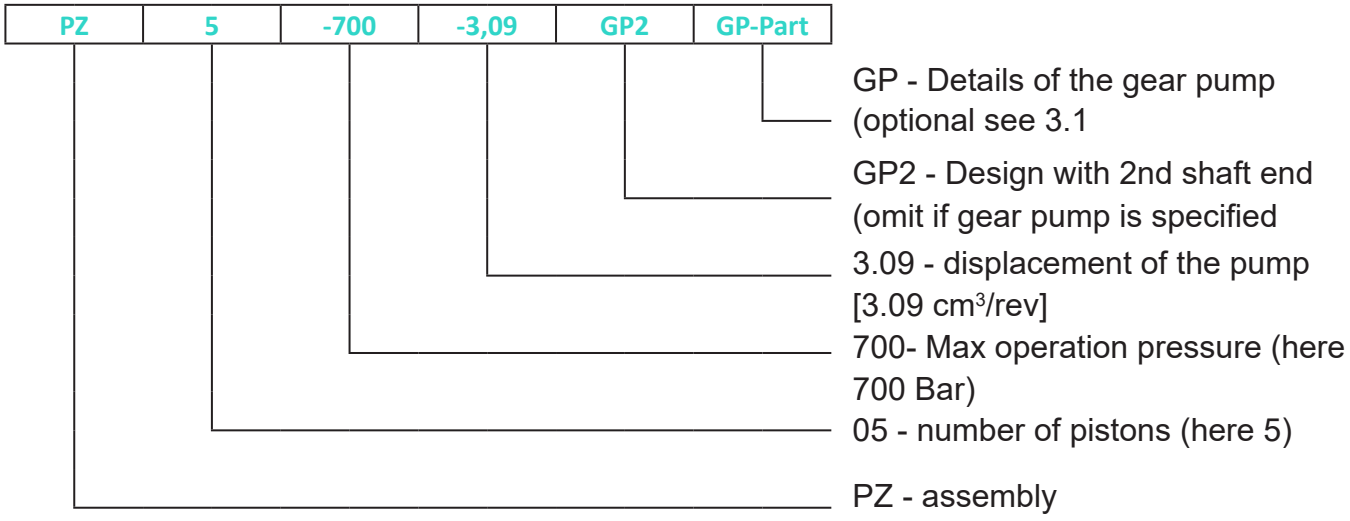

3. COMBINATION PUMPS

3.1 Gear pumps (for HP/LP-pumps)

All radial piston pumps (HP – high-pressure part) of the assemblies PD, P, PPZ und PZ are available connected directly with a gear pump (LP – low-pressure part). The available gear pumps are external gear pumps made by the company MARZOCCHI or CASAPPA.

Also gear pumps from other producers with the appropriate flange can be connected to the pumps.

The type designation of the combination HP/LP-pump is made up of the type designation of the high-pressure part (see sect. 2.2) and an analogous type designation of the low-pressure part (see example).


Type Designation HP/LP-pumps:

SYNTAX: HP-part – assembly, direction of rotation, possibly shaft type, possibly connection type, displacement - max. operating pressure

- Assembly: GP1D..G, GP2D...F or GP3D
- Direction of rotation: direction of rotation (when looking at shaft end) clockwise rotation: D, counter-clockwise rotation: S
- Connections: suction and pressure connection
  - GAS – design with integrated threads measured in inches in housing (GP1)
  - without designation standard angled flanges, straight flanges upon request (GP2 & GP3)
- Displacement: in cm^3/rev

* Operating pressure max. operating pressure (depends on the radial piston pump)

Example:

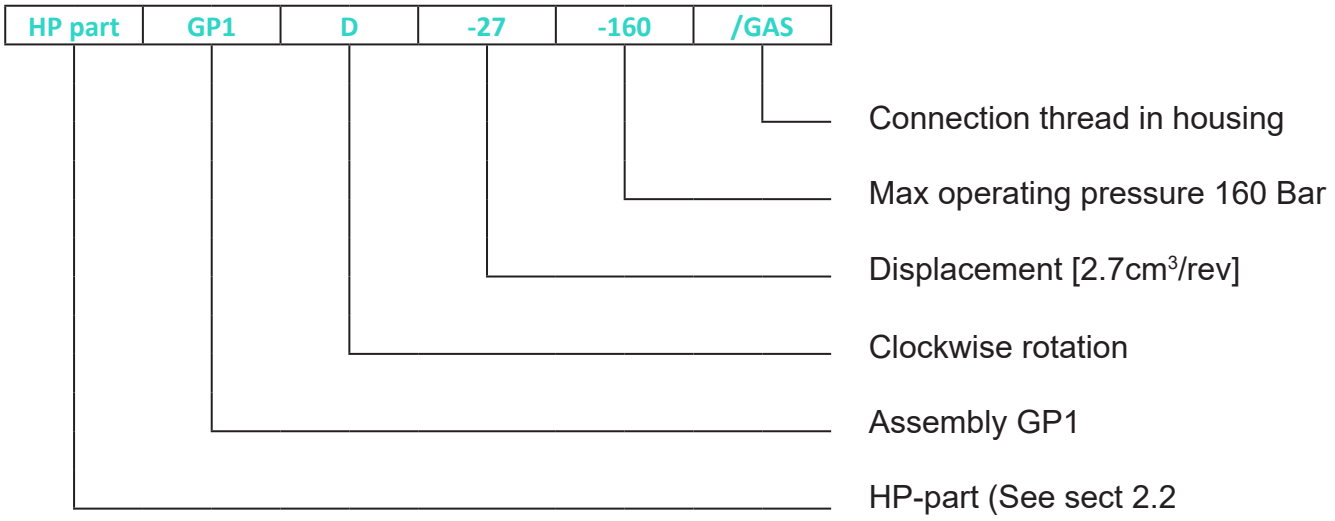

The gear pumps are directly connected to the second shaft end (type GP1 respectively) of the radial piston pumps of assemblies PD, PPZ and PZ.

P_{max} [bar] is equivalent to the max. operating pressure of the gear pump if the gear pump is used separately (manufacturer information). The max. operating pressure of the gear pump in a HP/LP-combination pump depends on the used radial piston pump. Further information on request

3.1.1 Delivery volume 1.1 - 8.0 cm³/rev

Assembly	WIMGP1D..G										
Output [cm³/rev]	1.1	1.3	1.6	2.1	2.7	3.2	3.7	4.2	4.8	5.8	8.0
P_{max} [bar]	230	230	230	230	230	210	210	210	190	190	160

Suction and pressure connections

Size 1P: a) integrated screw-in thread, intake and pressure side 3/8", design /G

b) Angle flange available on request

3.1.2 Delivery volume 4.5 - 28.2 cm³/rev

The gear pumps are directly flange connected to the second shaft end (type GP2) of the radial piston pumps of assemblies PPZ, PZ and P.

Assembly	WIMGP2D...F												
Output [cm³/rev]	4.5	6.4	7.0	8.3	9.6	11.5	14.1	16.0	17.9	21.1	23.7	25.5	28.2
p_{max} [bar]	250	250	250	250	250	230	230	210	210	180	180	170	170

Angle connections for gear pumps are available in the following sizes: (square)

Suction connection	40 > 3/8"	40 >1/2"
Pressure connection	35 > 3/8"	35 >1/2"

Fixing materials included. Straight connections available upon request.

3.1.3 Delivery volume 20 - 87 cm³/rev (HP-Assemblies P and PW)

The gear pumps are flange connected tot the second shaft end type I of the radial piston pumps of assemblies P and PW

Assembly	WIMGP3D…										
Output [cm³/rev]	20	22	26	33	39	44	52	61	71	78	87
p_{max} [bar]	230	230	230	230	220	210	200	190	170	160	140

Angle connections for gear pumps are available in the following sizes: (rhombus)

Suction connection	51 > 3/4"	51 > 1"	56 > 3/4"	56 > 1"	62 > 1"	62 > 1"1/4
Pressure connection	51 > 3/4"	51 > 1"	56 > 3/4"	56 > 1"		

Fixing materials included. Straight connections available upon request.

3.2 Multiple circulation pumps, twin pumps and special capacities

Multiple circulation pumps:

The different output circuits make it possible to control overlapping movements of the consumers in hydraulic systems at any load without influencing one another and only low additional expense of the design. In addition, it is also possible to use a pressure connection to remove controlling oil.



All **WIMMER** radial piston pumps, with the exception of the one cylinder pumps, are available with several pressure connections.


The maximum number of pressure connections depends on the number of pistons. It is also possible to divert one output from every piston or to group a number of pistons together from which the output is derived.

For the appropriate type designation see example 2 in sect. 2.2. A table to define the different combinations of delivery volumes is available upon request.

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

Twin and multiple pumps:

WIMMER radial piston pumps can be combined to create twin and multiple pumps using an intermediate flange and coupling unit. This enables the maximum output to be increased. Twin and multiple pumps can be made as multiple circulation pumps with several pressure connections per pump. Further information upon request.

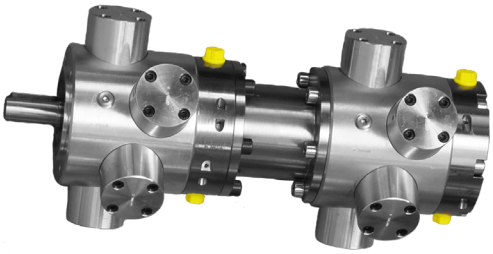

Special designs:


Outputs: By altering the height of stroke, a capacity deviation from that stated in the tables by up to 25% can be achieved.

Designs: Due to the modular system of the pumps, we have placed the emphasis of our customer orientation on being able to produce a variety of special designs (e.g. special casings, materials). As a flexible and innovative partner, we will gladly put our know-how at your disposal to fulfil your individual requirements.

Further information upon request.

4. SUB-OIL MOTOR PUMPS

WIMMER radial piston pumps can be supplied with a sub-oil motor flanged to the pump as well. These motor pumps type 'MU' are designated for installation inside of the oil tank, i.e. pump and motor run in oil. The assembly of the motor pump unit can functionally be mounted to the tank lid or directly to the oil tank with simple brackets, preferably with damping elements.

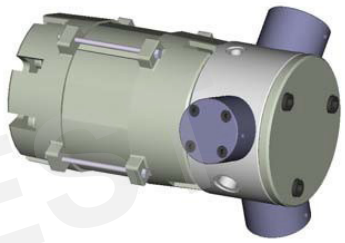


In comparison to the arrangement of a conventional tank design there are several advantages. As pump and motor are directly mounted to each other this compact assembly needs less space. This results in more space being availa-ble for mounting components on the lid like valves, control boxes etc. Furthermore the acceptable exploitation of the motor capacity is higher due to the acute cooling effect of the oil scavenging around it. A further advantage is a lower noise level as the noises of the running motor and the cooling fan are not radiated directly like it is the case with a motor standing free.

ON REQUEST

The sub-oil motor pumps preferably run in intermittent duty S3 (interrupting duty). In case of an oil tank of sufficient capacity (temperature control!), idling duty (running though duty with interrupting stress) is possible as well.

This pump type is also applicable for two-stage- or double-circuit- installations due to the option to combine radial piston pumps with gear pumps (HP/LP pumps).

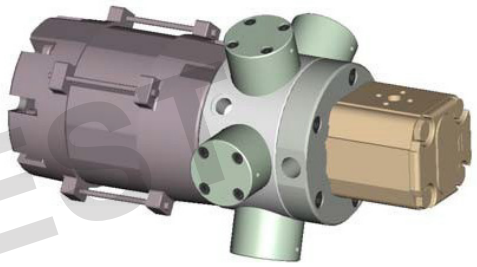

ON REQUEST

4.2 Overview radial piston pumps

Appropriate te mount a sub-oil motor:

Size	Assembly	Number of pistons	Piston diameter [mm]				
			8	9	10	12	16
2	UPD	2	1,1	1,4	1,8	2,5	4,5
			0,80	***1,02***	***1,26***	***1,80***	***3,22***
			700	700	700	700	500
	UPZ	3	2,1	2,7	3,3	4,8	
			1,50	**1,92**	**2,37**	**3,39**	
			700	700	500	500	
		5	3,5	4,5	5,5	8,0	
			2,51	***3,18***	***3,93***	***5,65***	
			700	700	500	500	

8,0	= guide value of the delivery volume Q_{th} [l/min] at 1450 rpm
5,65	= geometric displacement Vg [cm^3/rev]
500	= max. allowoble operating pressure Pmax [bar]

ON REQUEST

All radial piston pumps are available with a second shaft end (type GP2) to mount a gear pump type GP2D...F (see sect. 3.1) as well (HP/LP pumps).

A volume flow differing from the actual values in the charts can be realized by using different piston diameters or special strokes

Type Designation:

SYNTAX (only HP-pump):

ASSEMBLY / number of pistons – operating pressure – displacement

SYNTAX (HP/LP-pump):

ASSEMBLY / number of pistons – operating pressure – displacement / 2nd shaft end – GP-part

ON REQUEST

Example:

UPZ	05	-700	-3,18	GP2	GP-Part

GP - Details of the gear pump (optional see 2.1 and 6.3)

GP2 - Design with 2nd shaft end (omit if gear pump is specified)

3.18 - displacement of the pump [3.09 cm^3/rev]

700- Max operation pressure (here 700 Bar)

05 - number of pistons (here 5)

UPZ - assembly UPZ

4.3 Overview sub-oil motors:

General information:

Three-phase asynchronous motor 230/400 V and 400/690 V respectively

One-phase alternating current motor 230 V / 50 Hz


Isolation category H


Protection category IP 10

Voltage tolerance ± 5%

Operating mode S3-30%

ON REQUEST

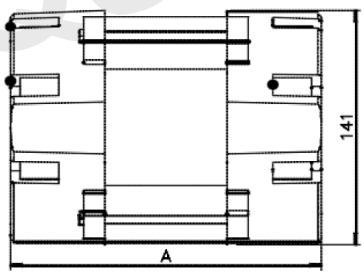

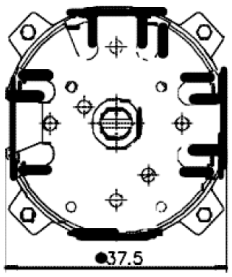

5. HYDRAULIC AGGREGATES

All **WIMMER** radial piston pumps can be delivered together with drive motor, pump support, valves and hydraulic oil tank as well as with a number of different attachments as complete hydraulic aggregates. Customer requests (e.g. design of tank lid) can be taken into consideration to work out a tailor-made solution.





WIMMER hydraulic aggregates can be delivered as tank aggregates up to 1000 bar. Usually a flanged motor which is mounted vertically on the container lid, is used for tank aggregates. Therefore the pumps are operating in the oil. Pumps mounted with an sub-oil motor are also available.

Aluminium Tank: The following tank sizes are available as standard: 7 - 12 - 20 - 30 - 40 liters effective volume.

Units: lid and pump support are usually made of light alloy.

Larger steel tanks up to 1250 liters oil volume and special dimensions are available upon request.




6. DATA SHEETS

6.1 Radial Piston Pumps (Standard)

Assembly PPZ/01, PPZ/02



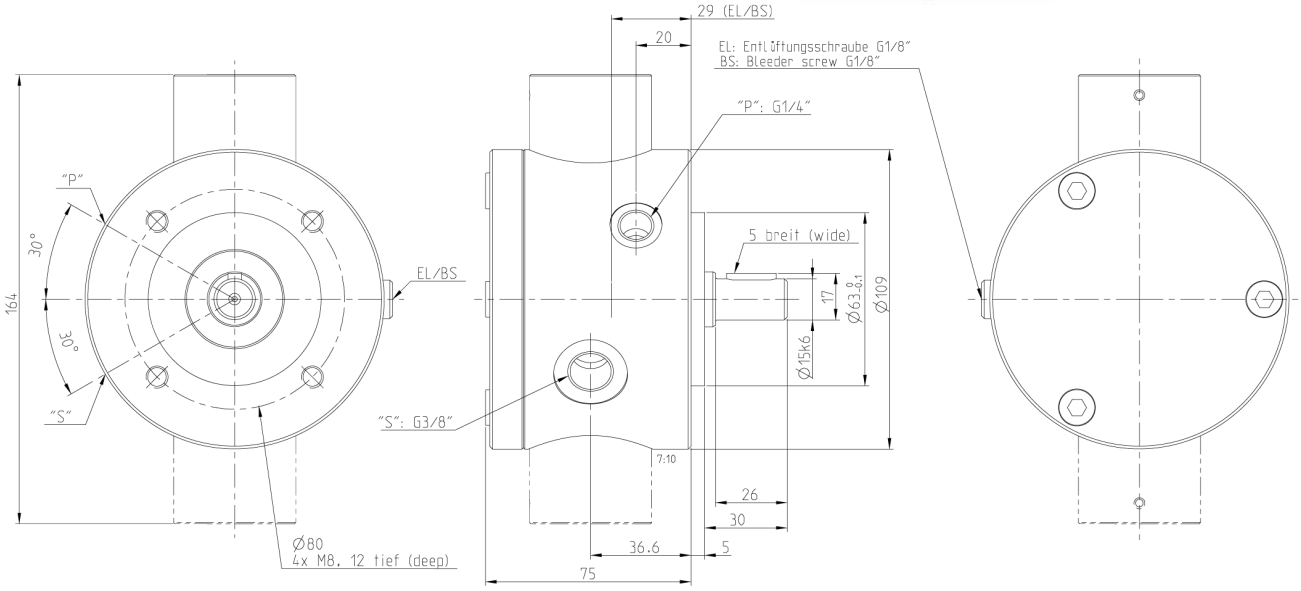


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,30	0,21	700,00	2,20	PPZ/01-700-0,21
0,53	0,37	700,00	2,20	PPZ/01-700-0,37
0,83	0,57	500,00	2,20	PPZ/01-500-0,57
0,60	0,41	700,00	2,50	PPZ/02-700-0,41
1,06	0,73	700,00	2,50	PPZ/02-700-0,73
1,66	1,14	500,00	2,50	PPZ/02-500-1,14


It is recommended not to install it self-priming but below the oil level.

A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PPZ/03

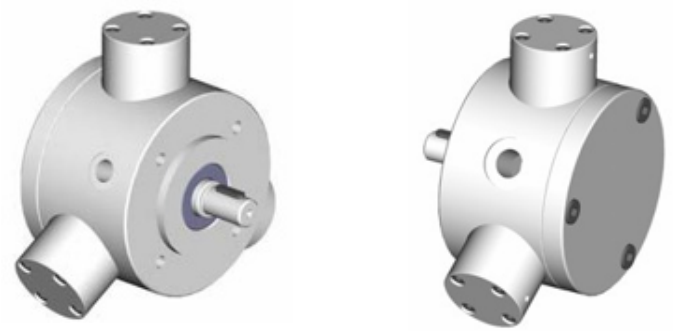

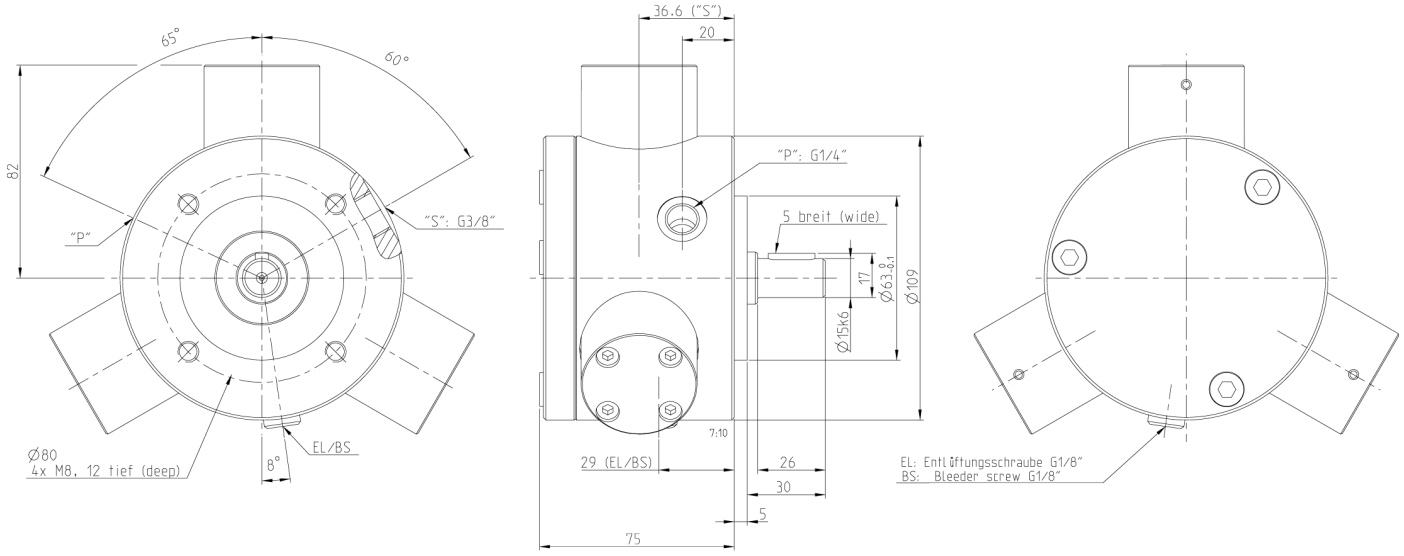

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,90	0,62	700	2,8	PPZ/03-700-0,62
1,59	1,10	700	2,8	PPZ/03-700-1,10
2,48	1,71	500	2,8	PPZ/03-500-1,71


It is recommended not to install it self-priming but below the oil level.


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

Assembly PD/01, PD/02, PDS/01,PDS/02

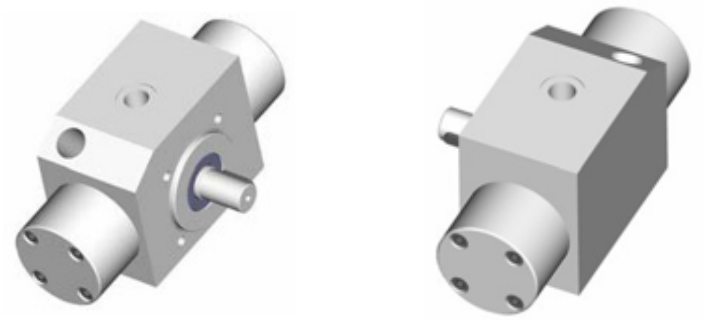

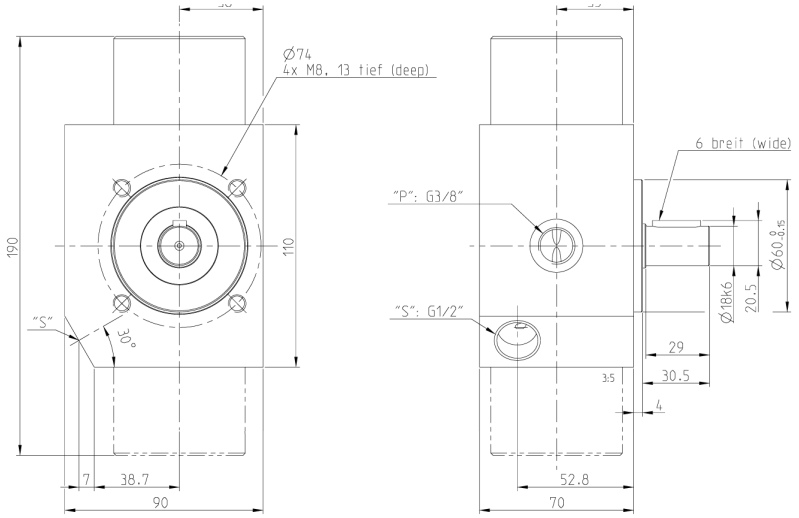


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,32	0,22	700	2,5	PD(S)/01-700(1000)-0,22
0,57	0,39	700	2,5	PD(S)/01-700(1000)-0,39
0,72	0,49	700	2,5	PD(S)/01-700(1000)-0,49
0,88	0,61	700	2,5	PD/01-700-0,61
1,27	0,88	700	2,5	PD/01-700-0,88
2,26	1,56	500	2,5	PD/01-500-1,56
0,64	0,44	700	2,8	PD(S)/02-700(1000)-0,44
1,13	0,78	700 (1000)	2,8	PD(S)/02-700(1000)-0,78
1,43	0,99	700 (1000)	2,8	PD(S)/02-700(1000)-0,99
1,77	1,22	700	2,8	PD/02-700-1,22
2,55	1,76	700	2,8	PD/02-700-1,76
4,52	3,12	500	2,8	PD/02-500-3,12


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

Assembly PZ/03

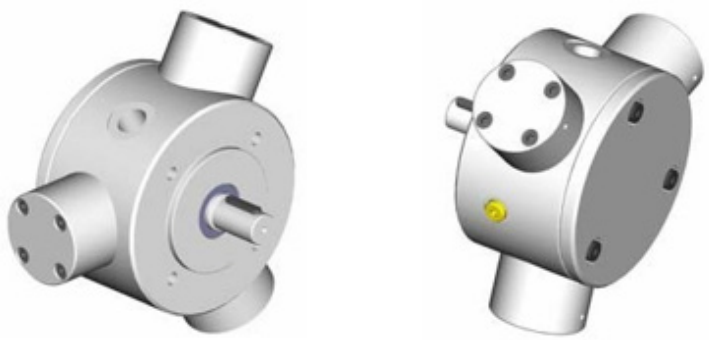

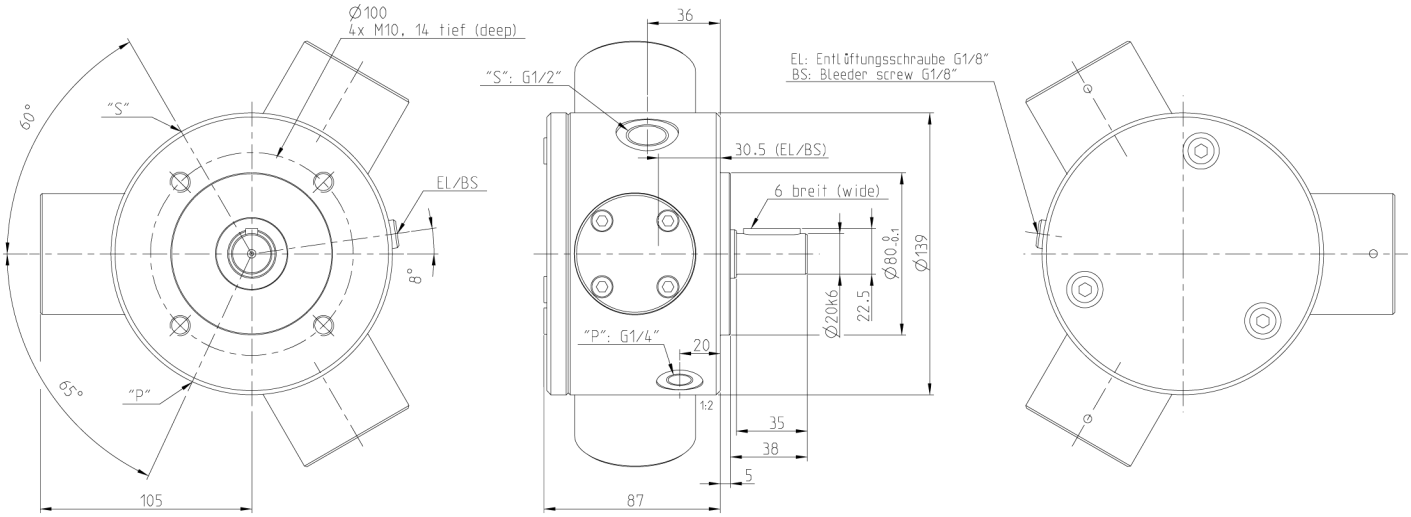


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,19	0,82	700	5,4	PZ/03-700-0,82
2,12	1,46	700	5,4	PZ/03-700-1,46
2,68	1,85	700	5,4	PZ/03-700-1,85
3,31	2,29	500	5,4	PZ/03-500-2,29
4,77	3,29	500	5,4	PZ/03-500-3,29
8,48	5,85	250	5,4	PZ/03-250-5,85


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PZ/05

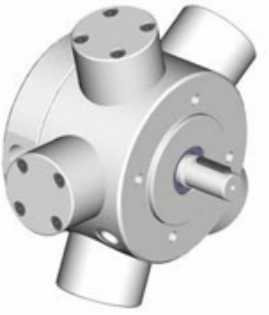



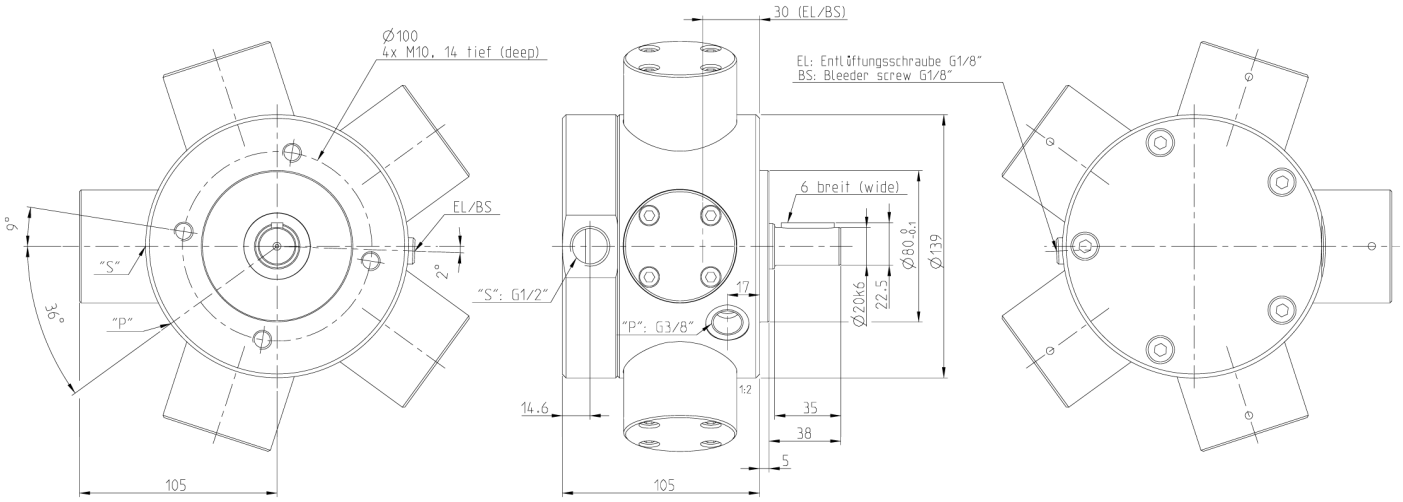


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,99	1,37	700	6,7	PZ/05-700-1,37
3,54	2,44	700	6,7	PZ/05-700-2,44
4,47	3,09	700	6,7	PZ/05-700-3,09
5,52	3,81	500	6,7	PZ/05-500-3,81
7,95	5,49	500	6,7	PZ/05-500-5,49
14,14	9,75	250	6,7	PZ/05-250-9,75


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PM/02



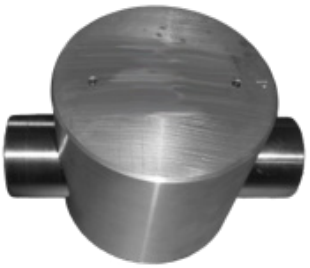

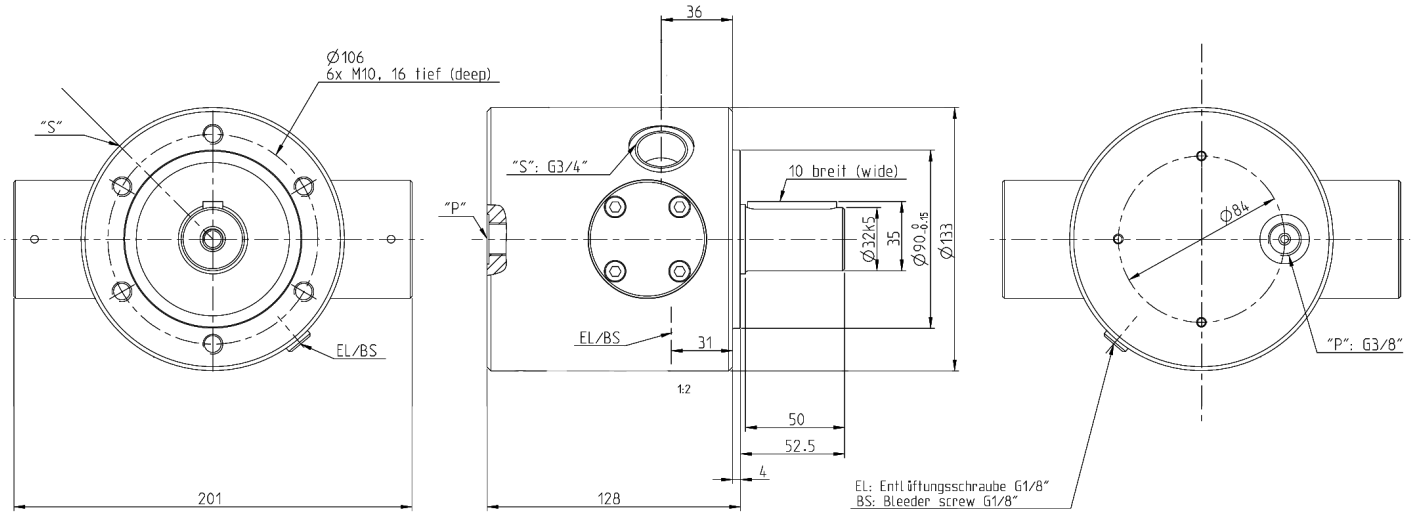



Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,80	0,55	1000	7,2	PM/02-1000-0,55
1,41	0,98	1000	7,2	PM/02-1000-0,98
1,79	1,23	1000	7,2	PM/02-1000-1,23
2,21	1,52	700	7,2	PM/02-700-1,52
3,18	2,19	700	7,2	PM/02-700-2,19
5,66	3,90	500	7,2	PM/02-500-3,90

A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PM/04

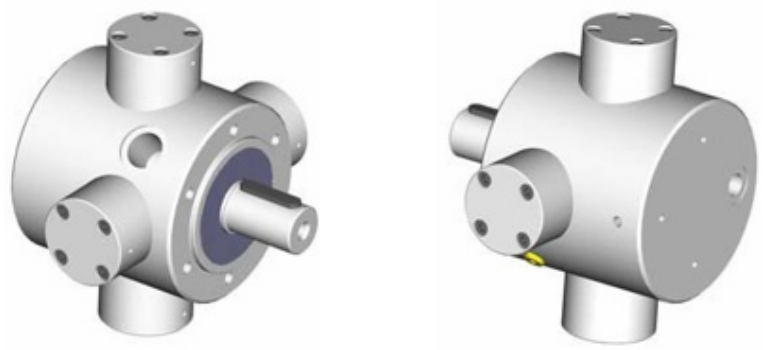

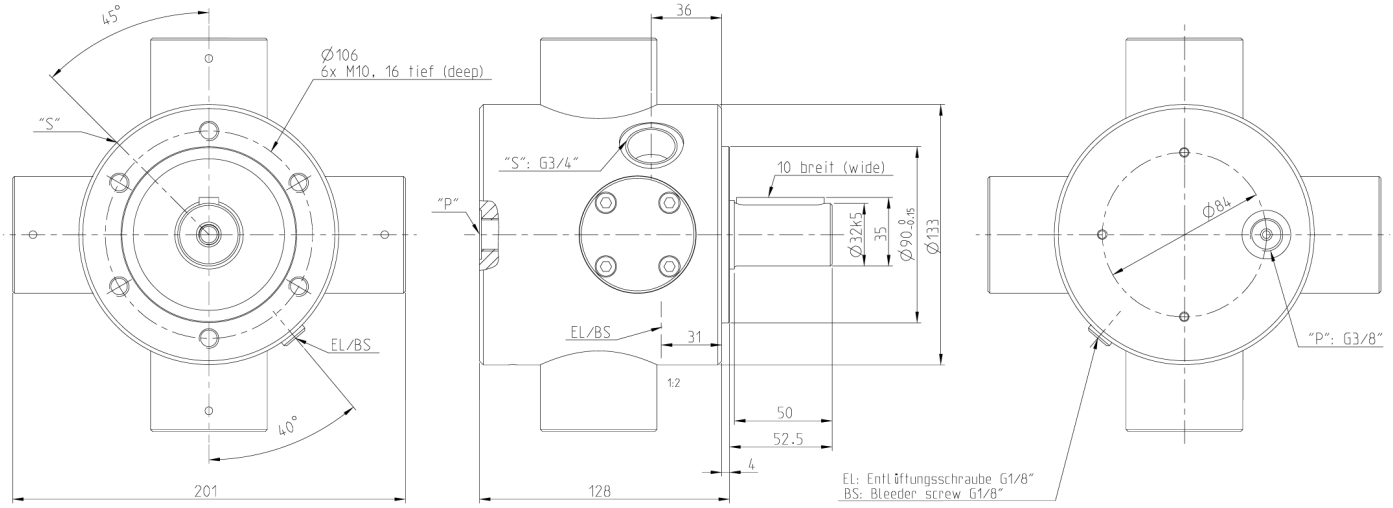



Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,59	1,10	1000	7,2	PM/04-1000-1,10
2,83	1,95	1000	7,2	PM/04-1000-1,95
3,58	2,47	1000	7,2	PM/04-1000-2,47
4,42	3,05	700	7,2	PM/04-700-3,05
6,36	4,39	700	7,2	PM/04-700-4,39
11,31	7,80	500	7,2	PM/04-500-7,80


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PM/06

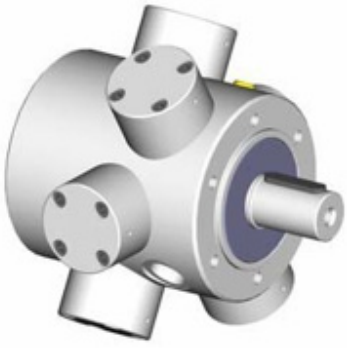

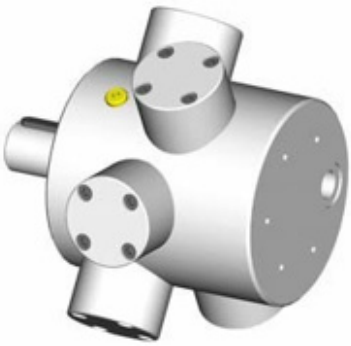

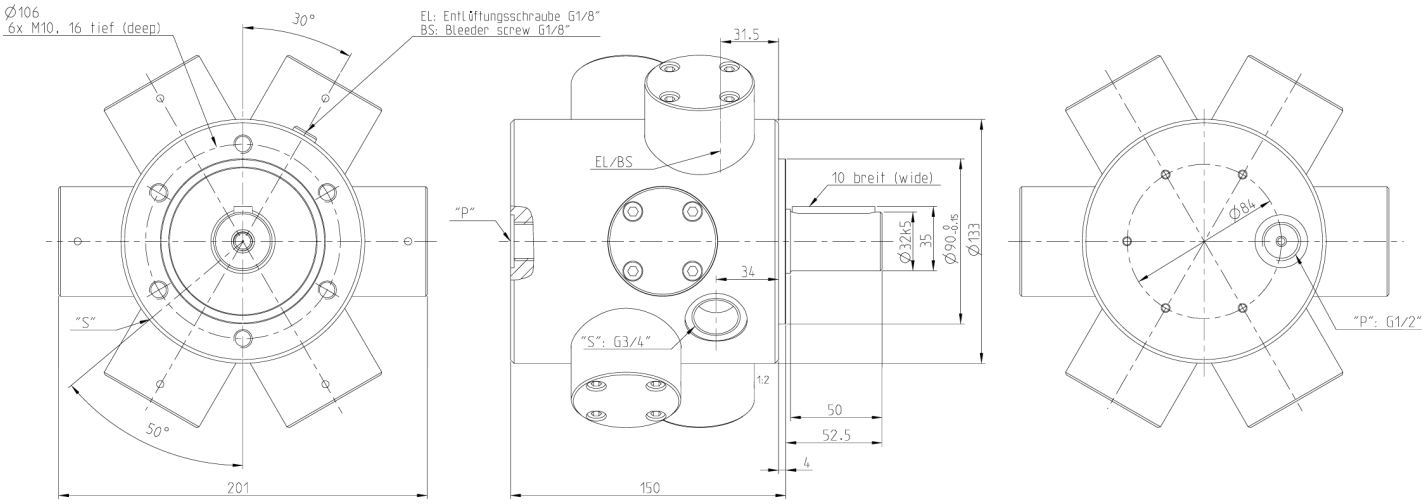


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
2,39	1,65	1000	7,2	PM/06-1000-1,65
4,24	2,93	1000	7,2	PM/06-1000-2,93
5,37	3,70	1000	7,2	PM/06-1000-3,70
6,63	4,57	700	7,2	PM/06-700-4,57
9,54	6,58	700	7,2	PM/06-700-6,58
19,97	11,70	500	7,2	PM/06-500-11,70


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

Assembly P/04, PS/04

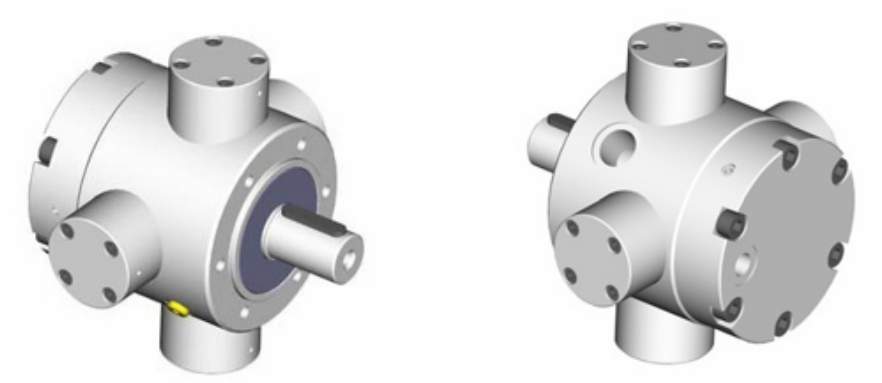

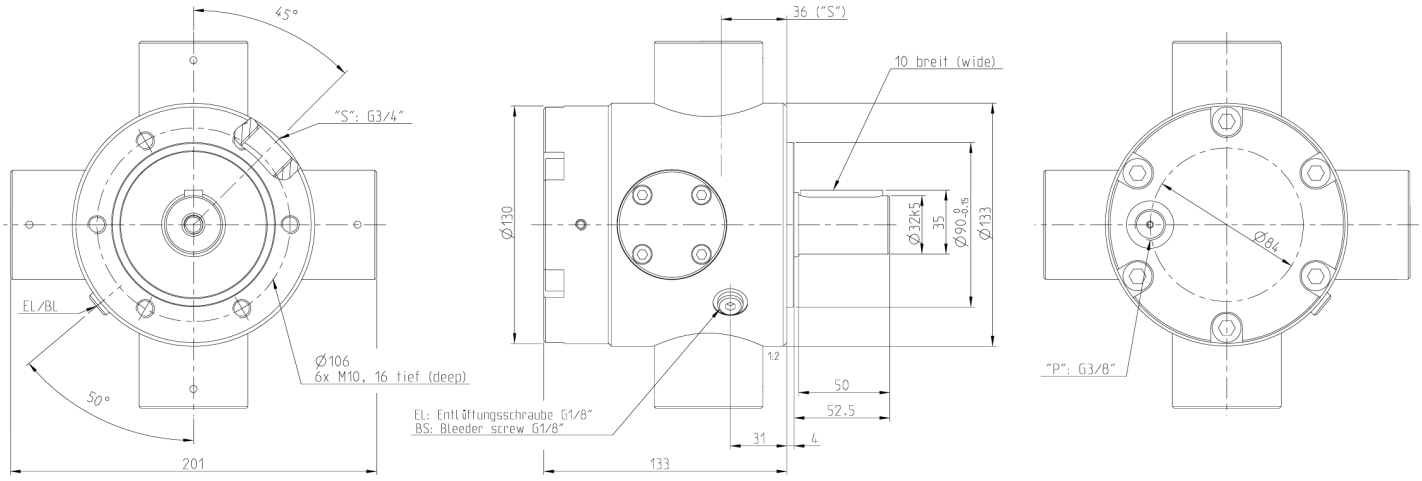


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,59	1,10	700(1000)	7,2	P(S)/04-700(1000)-1,10
2,83	1,95	700(1000)	7,2	P(S)/04-700(1000)-1,95
3,58	2,47	700(1000)	7,2	P(S)/04-700(1000)-2,47
4,42	3,05	700	7,2	PM/04-700-3,05
6,36	4,39	700	7,2	PM/04-700-4,39
11,31	7,80	500	7,2	PM/04-500-7,80


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.

All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

Assembly P/06, PS/06

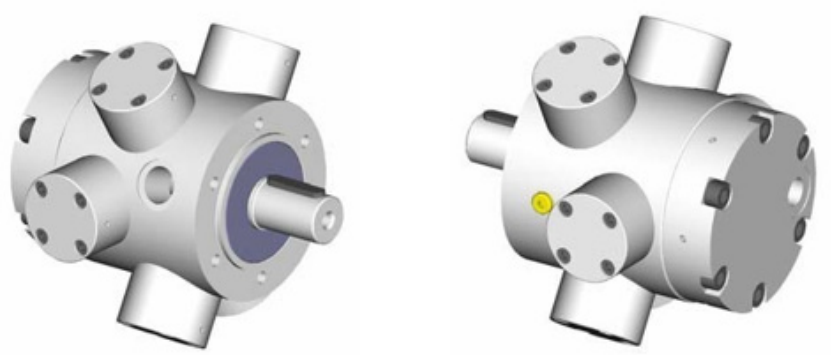

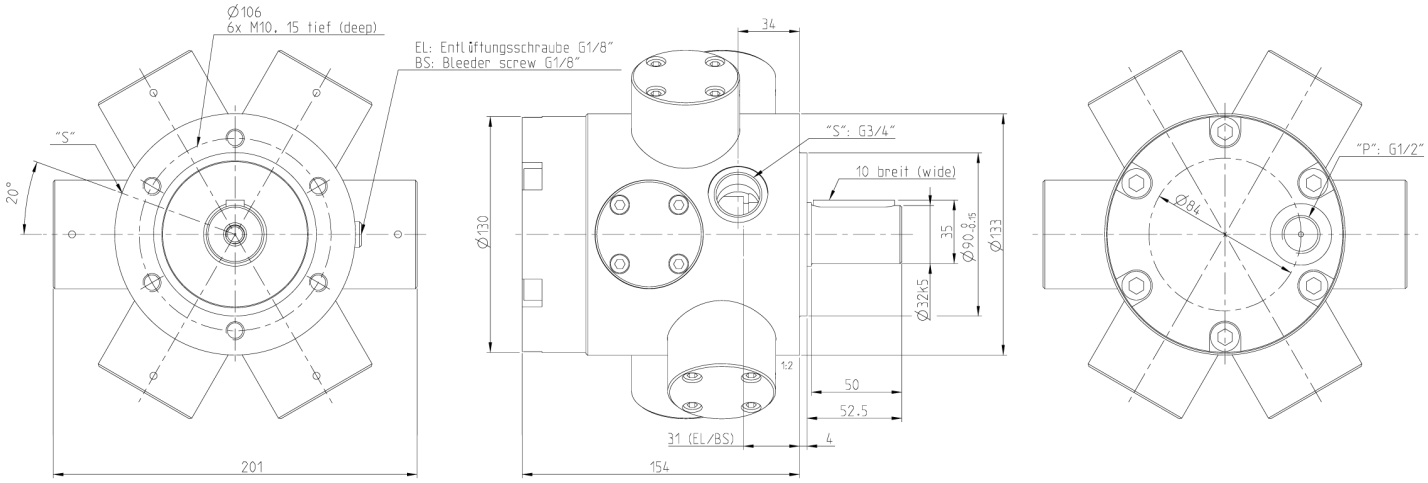

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
2,38	1,64	700(1000)	7,2	P(S)/06-700(1000)-1,65
4,24	2,93	700(1000)	7,2	P(S)/06-700(1000)-2,93
5,37	3,70	700(1000)	7,2	P(S)/06-700(1000)-3,70
6,63	4,57	700	7,2	PM/06-700-4,57
9,54	6,58	700	7,2	PM/06-700-6,58
19,97	11,70	500	7,2	PM/06-500-11,70


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.


All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

Assembly PW/04

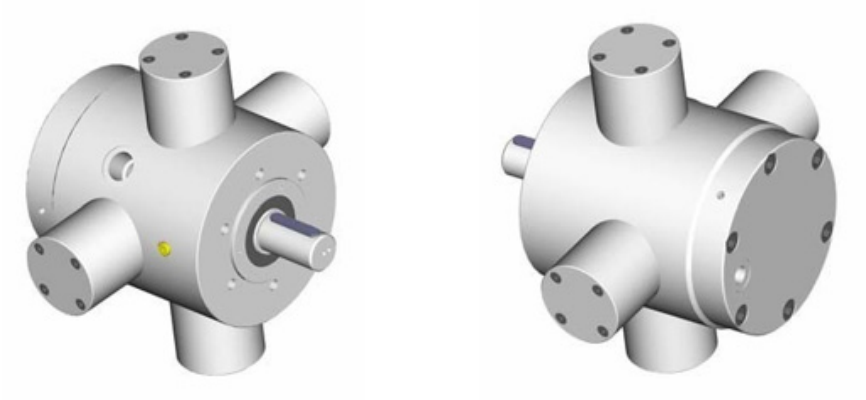

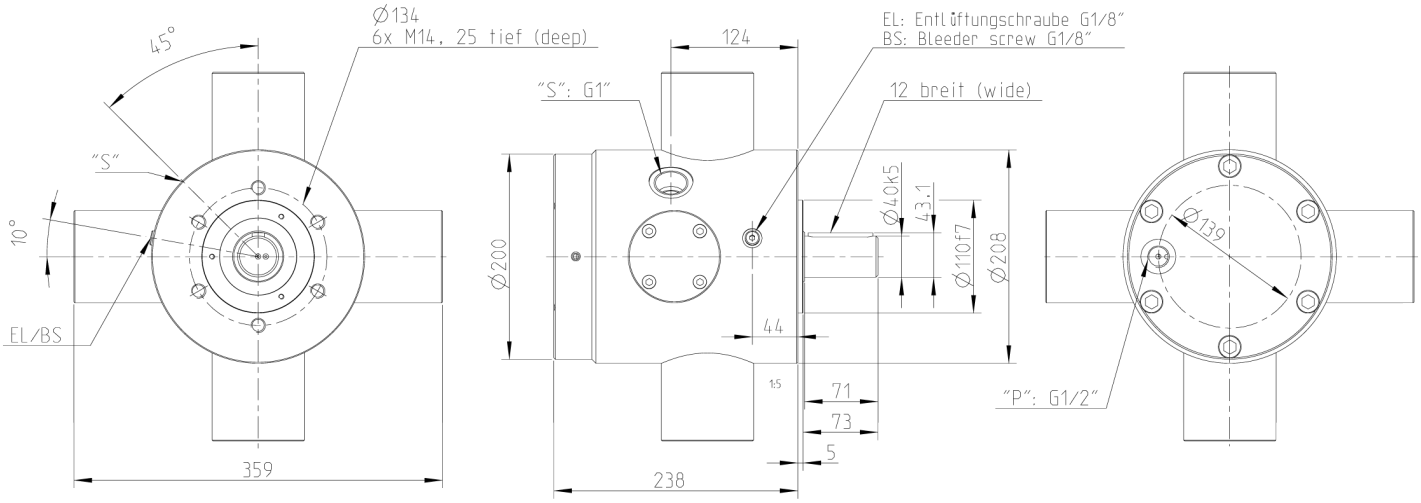


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
23,93	16,5	500	39	PW/04-500-16,50
25,97	17,91	500	39	PW/04-500-17,91
28	19,31	500	39	PW/04-500-19,31
30,04	20,72	500	39	PW/04-500-20,72
32,08	22,12	500	39	PW/04-500-22,12


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.

All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

Assembly PW/06

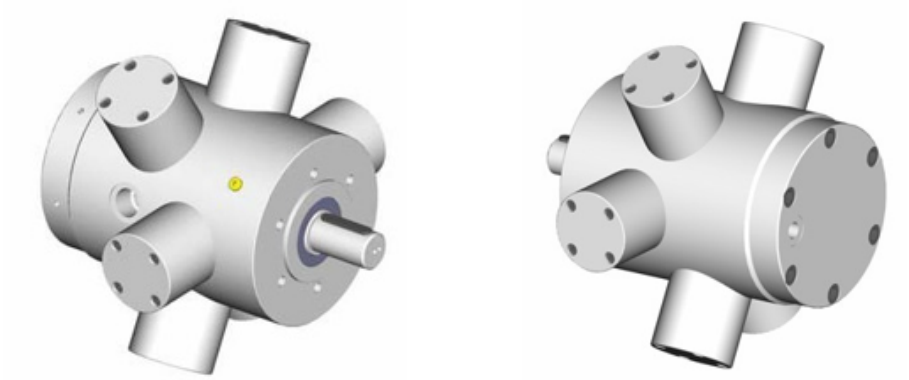

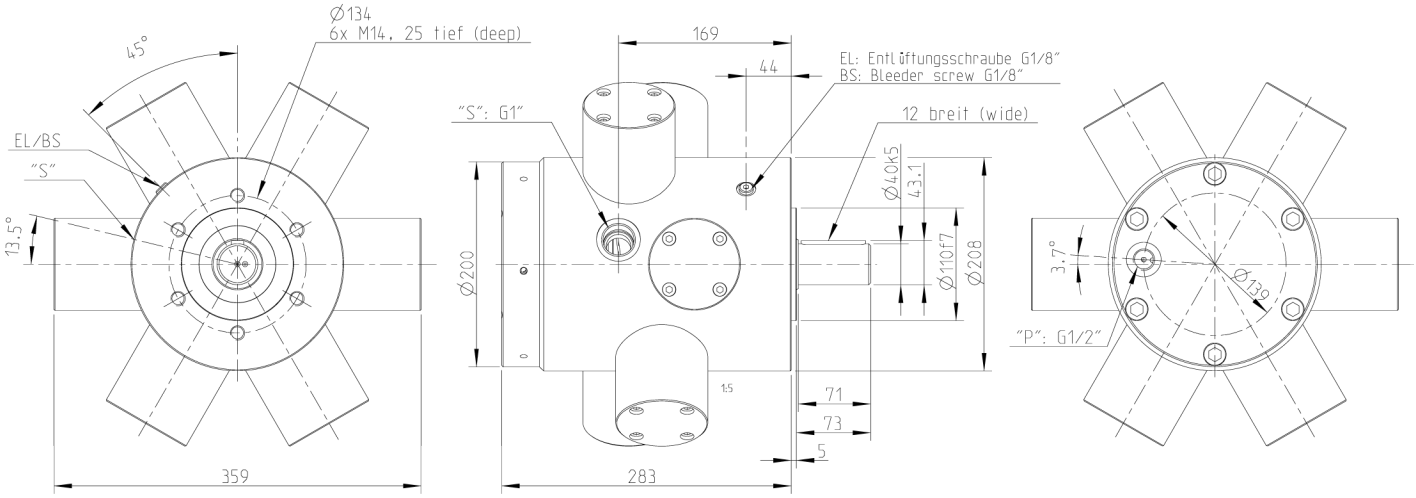

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
35,89	24,75	500	48	PW/06-500-24,75
37,93	26,16	500	48	PW/06-500-26,16
39,97	27,56	500	48	PW/06-500-27,56
42	28,97	500	48	PW/06-500-28,97
44,04	30,37	500	48	PW/06-500-30,37
46,08	31,78	500	48	PW/06-500-31,78
48,12	33,19	500	48	PW/06-500-33,19

A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.


All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.


More combination options see appendix or configurator.

6.2 Radial Piston Pump with second shaft end

Assembly PPZ/02.../GP2

for direct mounting a gear pump type GP2D...F (See page 45)

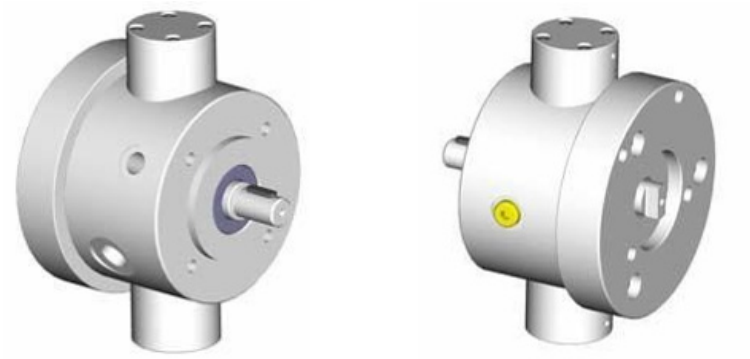

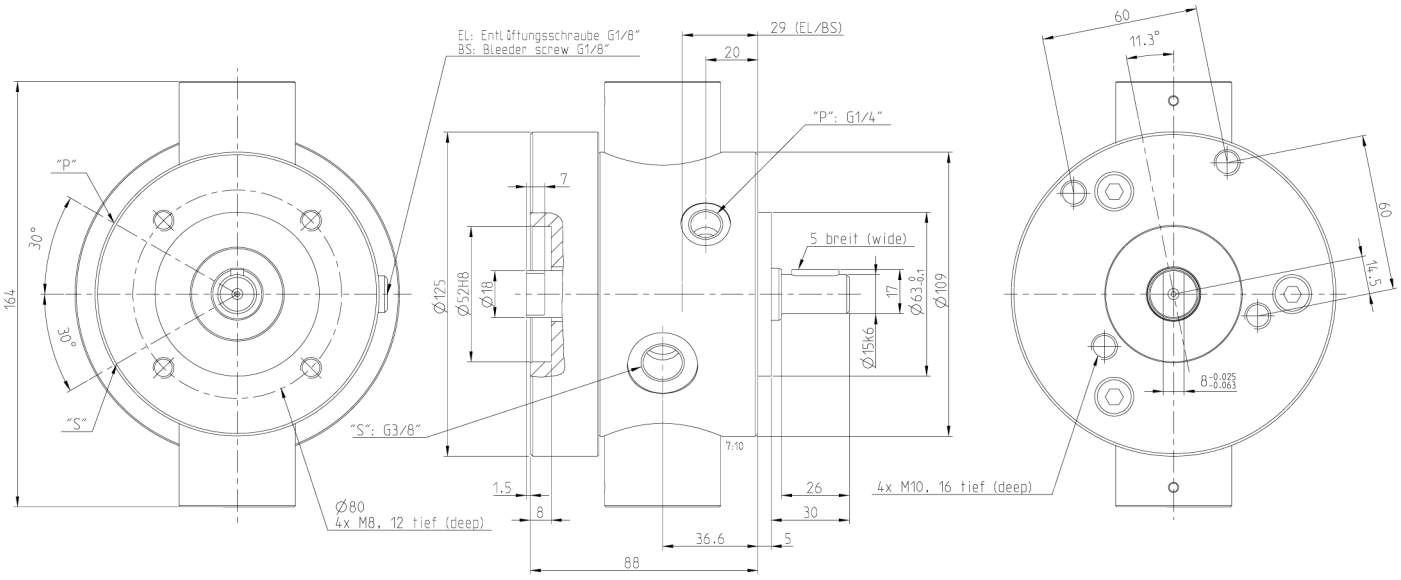

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,6	0,41	700	2,9	PPZ/02-700-0,41/GP2
1,06	0,73	700	2,9	PPZ/02-700-0,73/GP2
1,66	1,14	500	2,9	PPZ/02-500-1,14/GP2

It is recommended not to install it self-priming but below the oil level.


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PPZ/02.../GP1

for direct mounting a gear pump type GP1D...F (See page 44)



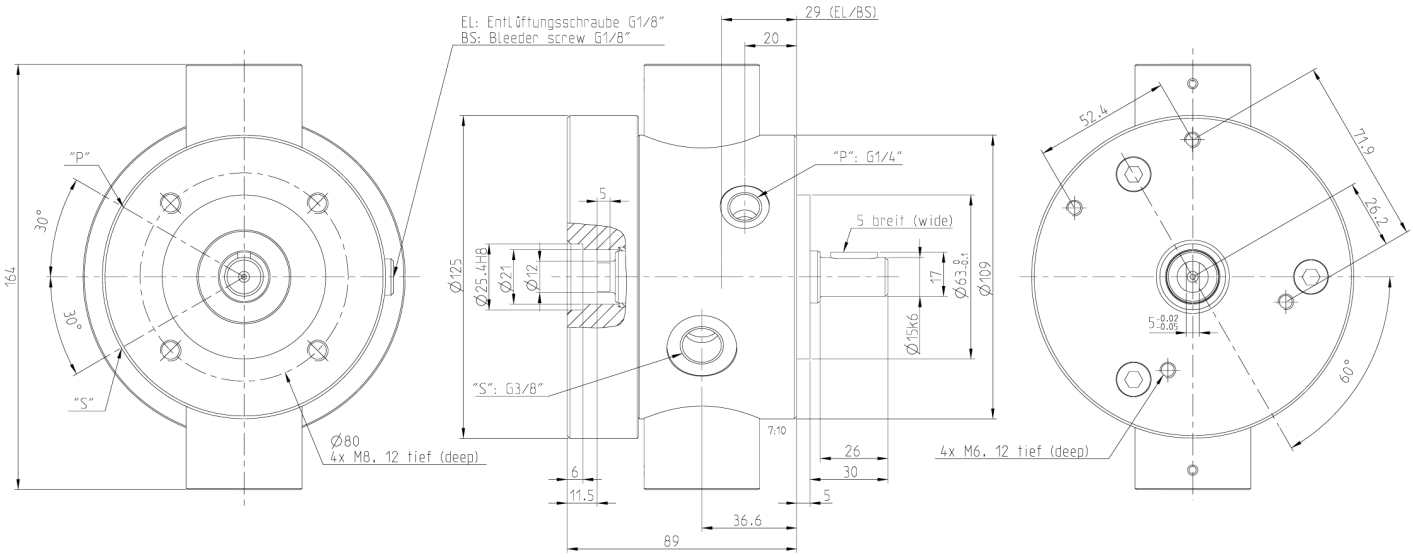

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,6	0,41	700	2,9	PPZ/02-700-0,41/GP1
1,06	0,73	700	2,9	PPZ/02-700-0,73/GP1
1,66	1,14	500	2,9	PPZ/02-500-1,14/GP1


It is recommended not to install it self-priming but below the oil level.


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PPZ/03.../GP2

for direct mounting a gear pump type GP2D...F (See page 45)

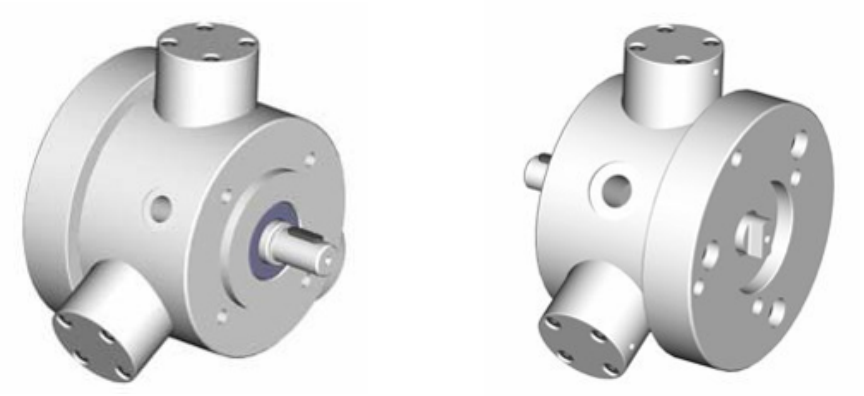

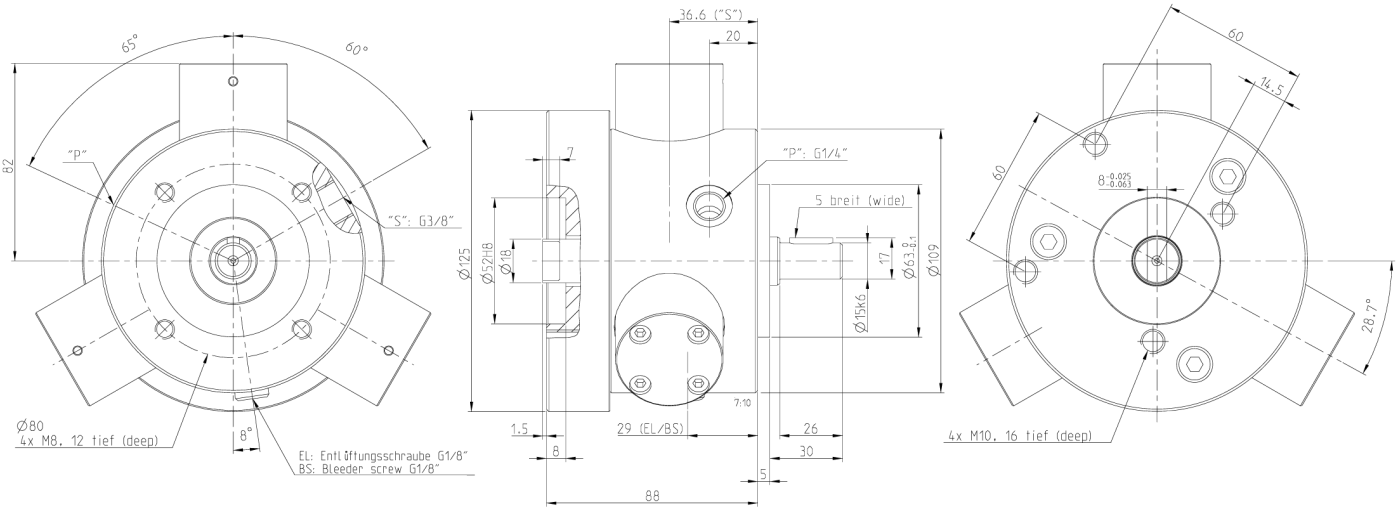

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,9	0,62	700	2,8	PPZ/03-700-0,62/GP2
1,59	1,1	700	2,8	PPZ/03-700-1,10/GP2
2,48	1,71	500	2,8	PPZ/03-500-1,71/GP2

It is recommended not to install it self-priming but below the oil level.


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.


More combination options see appendix or configurator.

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

Assembly PPZ/03.../GP1

for direct mounting a gear pump type GP1D...F (See page 44)

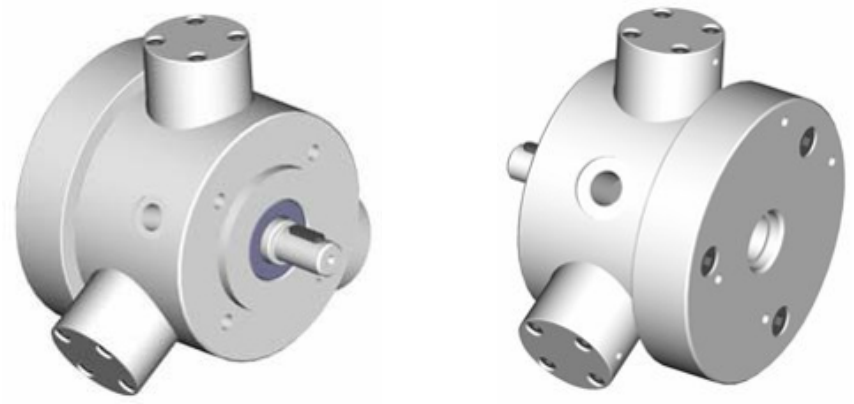

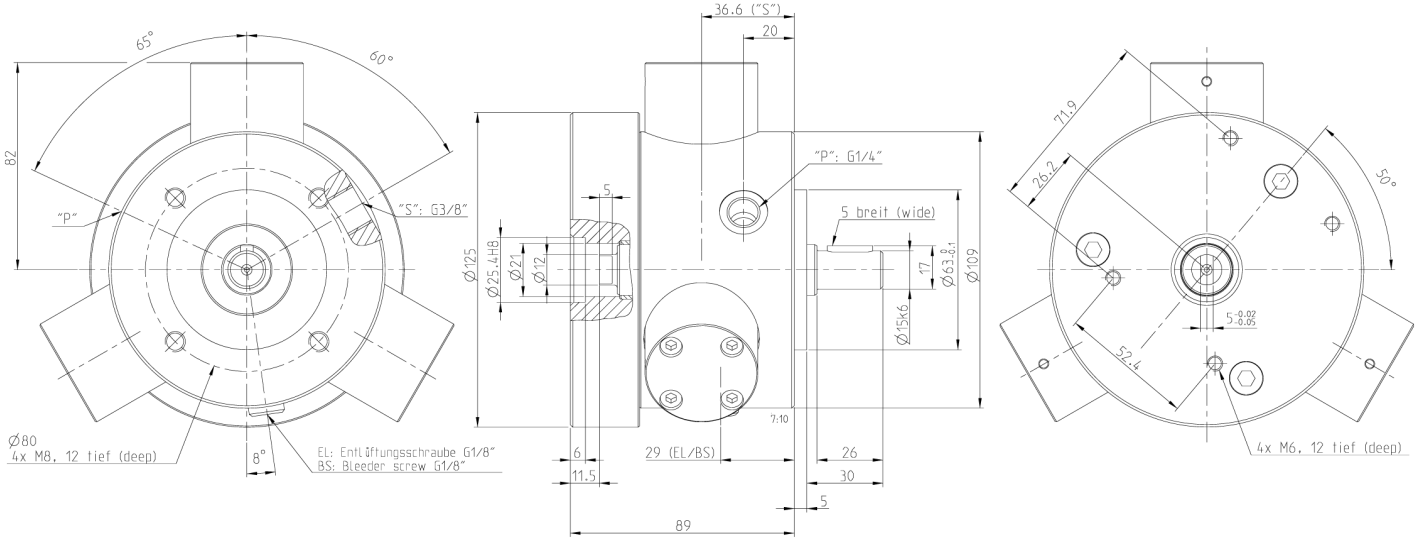

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,9	0,62	700	2,8	PPZ/03-700-0,62/GP1
1,59	1,1	700	2,8	PPZ/03-700-1,10/GP1
2,48	1,71	500	2,8	PPZ/03-500-1,71/GP1


It is recommended not to install it self-priming but below the oil level.


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PD/02.../GP1

for direct mounting a gear pump type GP1D...F (See page 44)

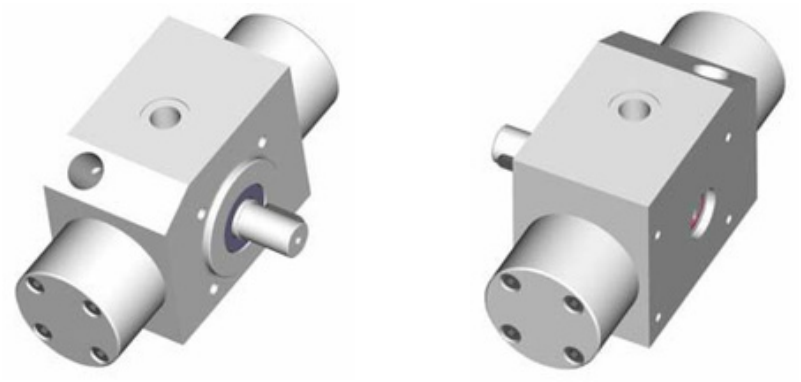

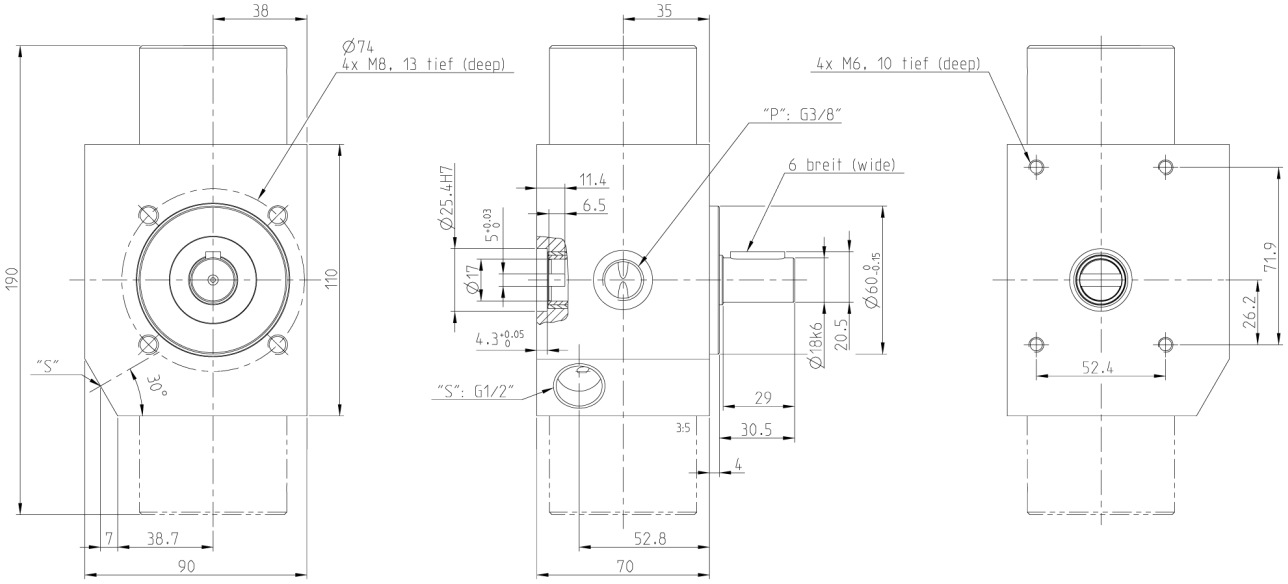


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
0,64	0,44	700	2,8	PD/02-700-0,44/GP1
1,13	0,78	700	2,8	PD/02-700-0,78/GP1
1,43	0,99	700	2,8	PD/02-700-0,99/GP1
1,77	1,22	700	2,8	PD/02-700-1,22/GP1
2,52	1,74	700	2,8	PD/02-700-1,76/GP1
4,52	3,12	500	2,8	PD/02-500-3,12/GP1


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PZ/03.../GP2

for direct mounting a gear pump type GP2D...F (See page 45)

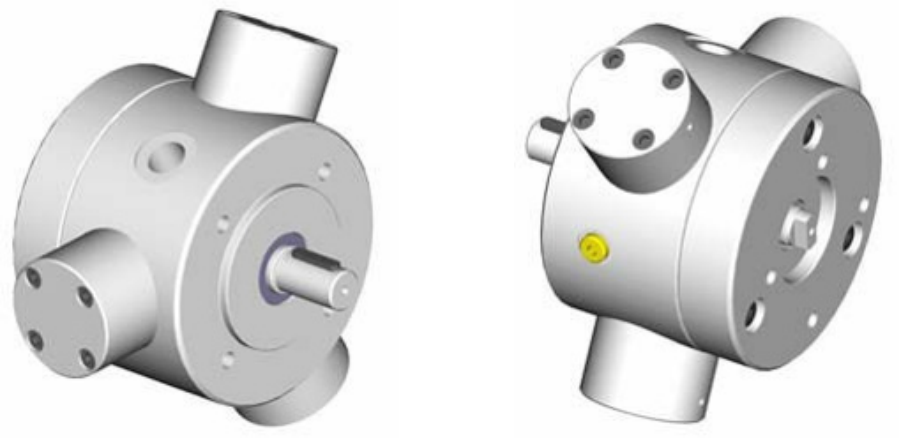

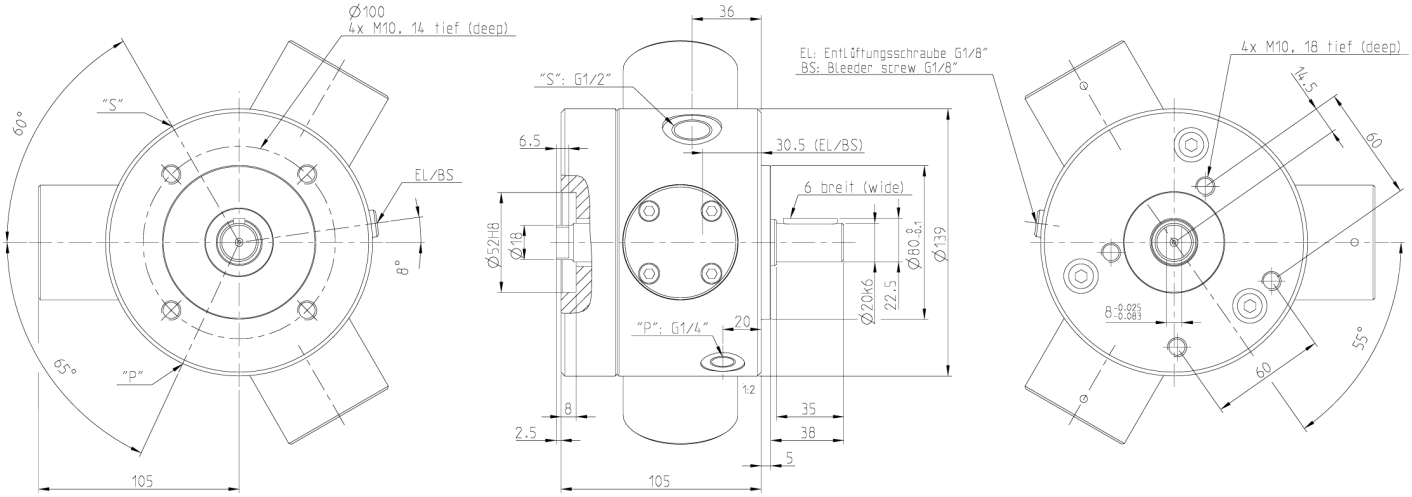


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,19	0,82	700	5,9	PZ/03-700-0,82/GP2
2,12	1,46	700	5,9	PZ/03-700-1,46/GP2
2,68	1,85	700	5,9	PZ/03-700-1,85/GP2
3,31	2,29	500	5,9	PZ/03-500-2,29/GP2
4,77	3,29	500	5,9	PZ/03-500-3,29/GP2
8.48	5.85	250	5.9	PZ/03-250-5.85/GP2


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PZ/03.../GP1

for direct mounting a gear pump type GP1D...F (See page 44)

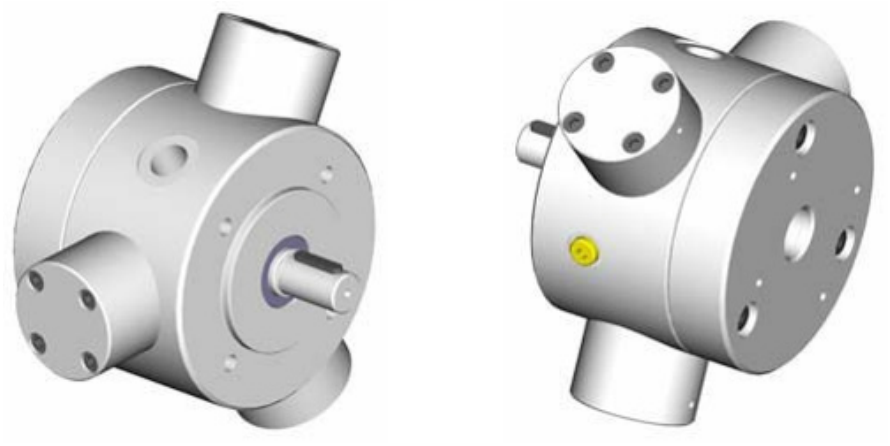

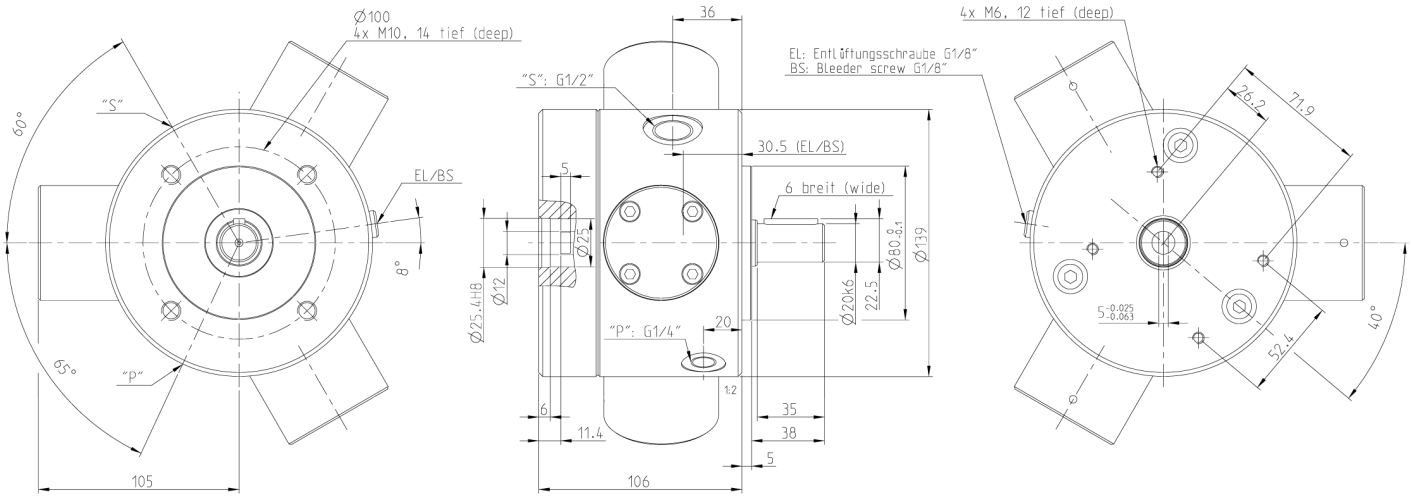


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,19	0,82	700	5,9	PZ/03-700-0,82/GP1
2,12	1,46	700	5,9	PZ/03-700-1,46/GP1
2,68	1,85	700	5,9	PZ/03-700-1,85/GP1
3,31	2,29	500	5,9	PZ/03-500-2,29/GP1
4,77	3,29	500	5,9	PZ/03-500-3,29/GP1
8.48	5.85	250	5.9	PZ/03-250-5.85/GP1


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PZ/05.../GP2

for direct mounting a gear pump type GP2D...F (See page 45)

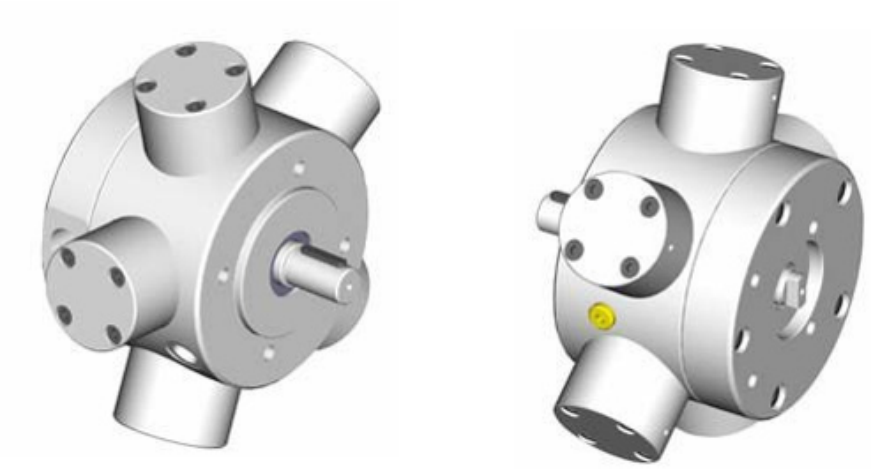

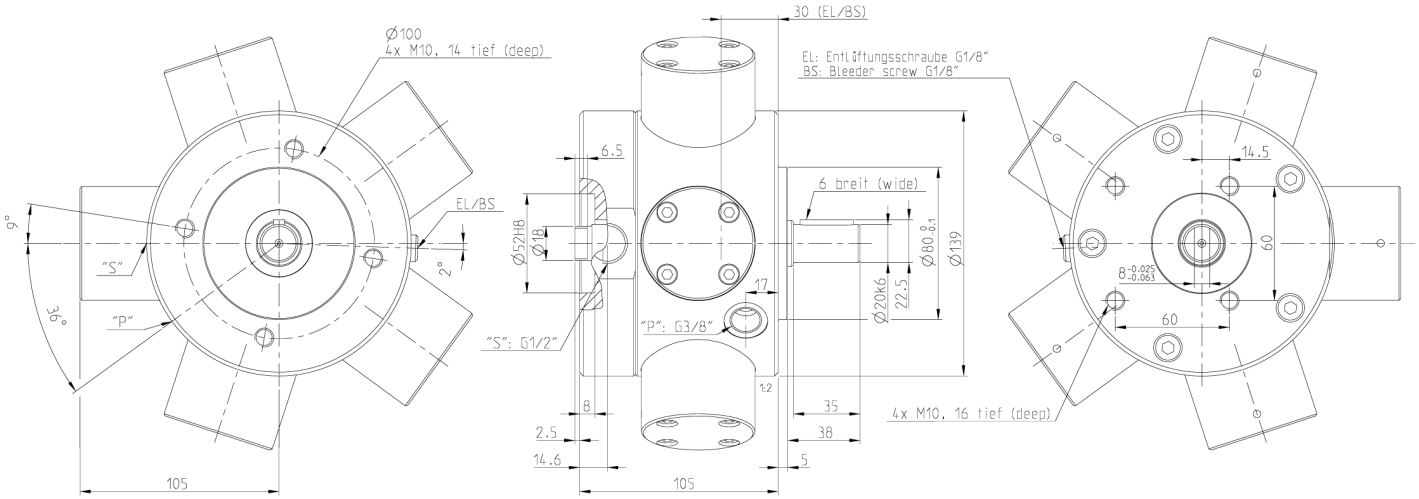


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,99	1,37	700	6,7	PZ/05-700-1,37/GP2
3,54	2,44	700	6,7	PZ/05-700-2,44/GP2
4,47	3,09	700	6,7	PZ/05-700-3,09/GP2
5,52	3,81	500	6,7	PZ/05-500-3,81/GP2
7,95	5,49	500	6,7	PZ/05-500-5,49/GP2
14,14	9,75	250	6,7	PZ/05-250-9,75/GP2


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly PZ/05.../GP1

for direct mounting a gear pump type GP1D...F (See page 44)

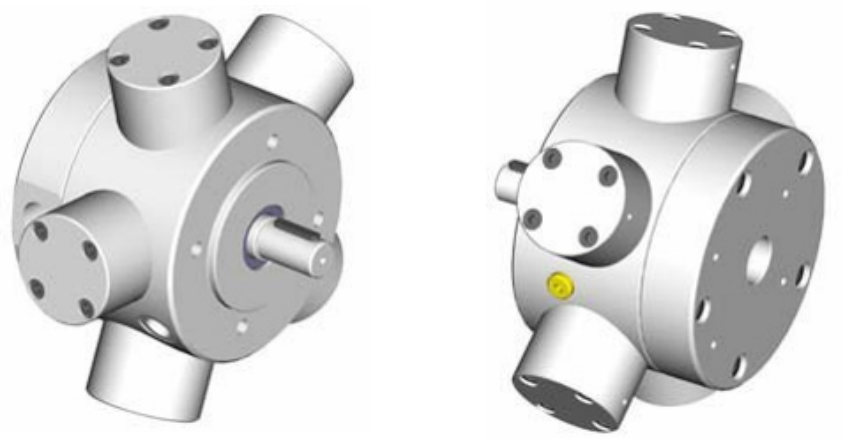

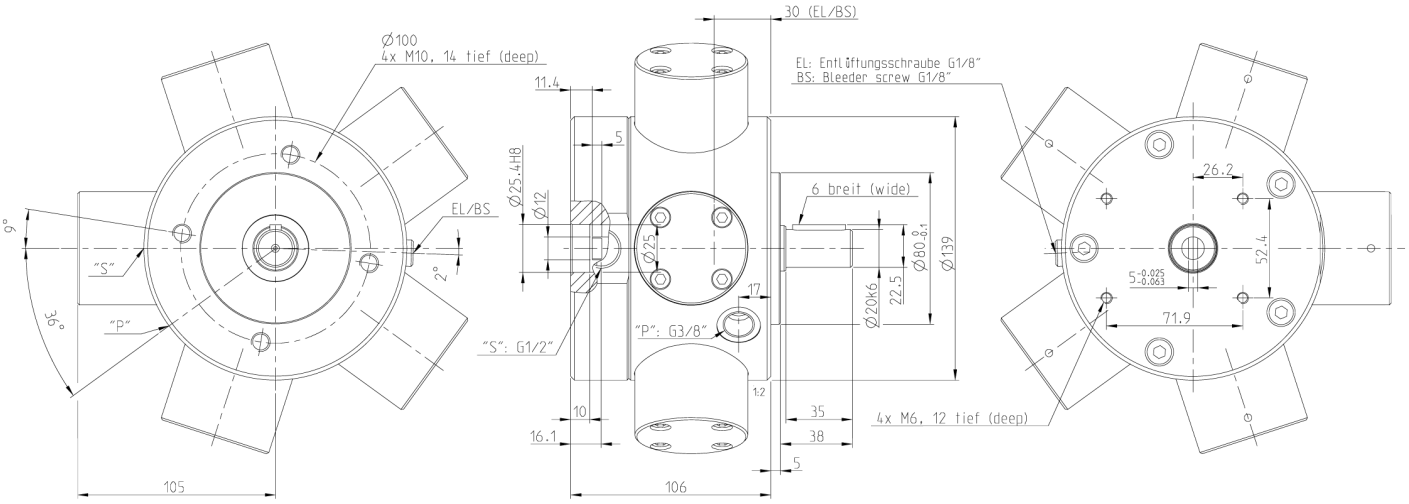



Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,99	1,37	700	6,7	PZ/05-700-1,37/GP1
3,54	2,44	700	6,7	PZ/05-700-2,44/GP1
4,47	3,09	700	6,7	PZ/05-700-3,09/GP1
5,52	3,81	500	6,7	PZ/05-500-3,81/GP1
7,95	5,49	500	6,7	PZ/05-500-5,49/GP1
14,14	9,75	250	6,7	PZ/05-250-9,75/GP1

A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes. Further information upon request.

More combination options see appendix or configurator.

Assembly P/04.../I, PS/04.../I

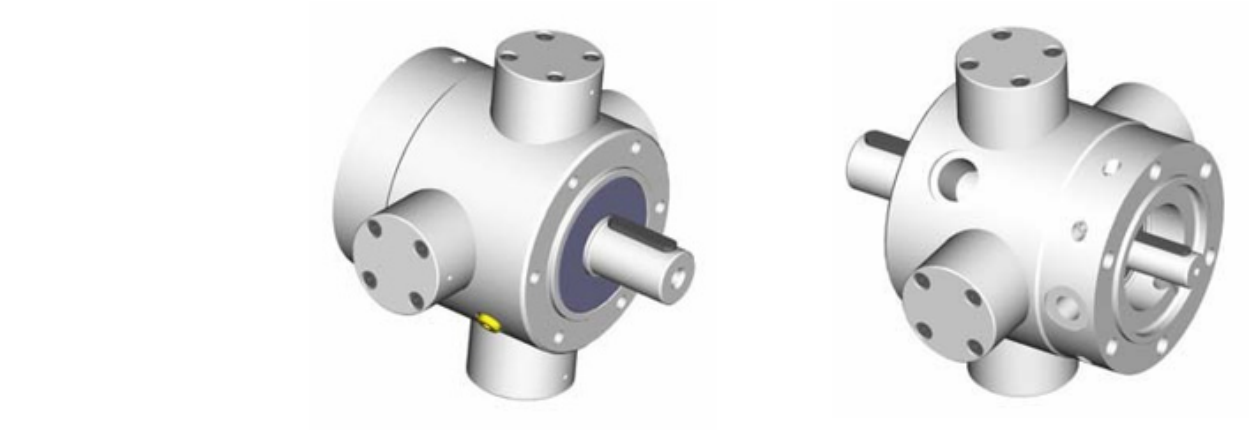

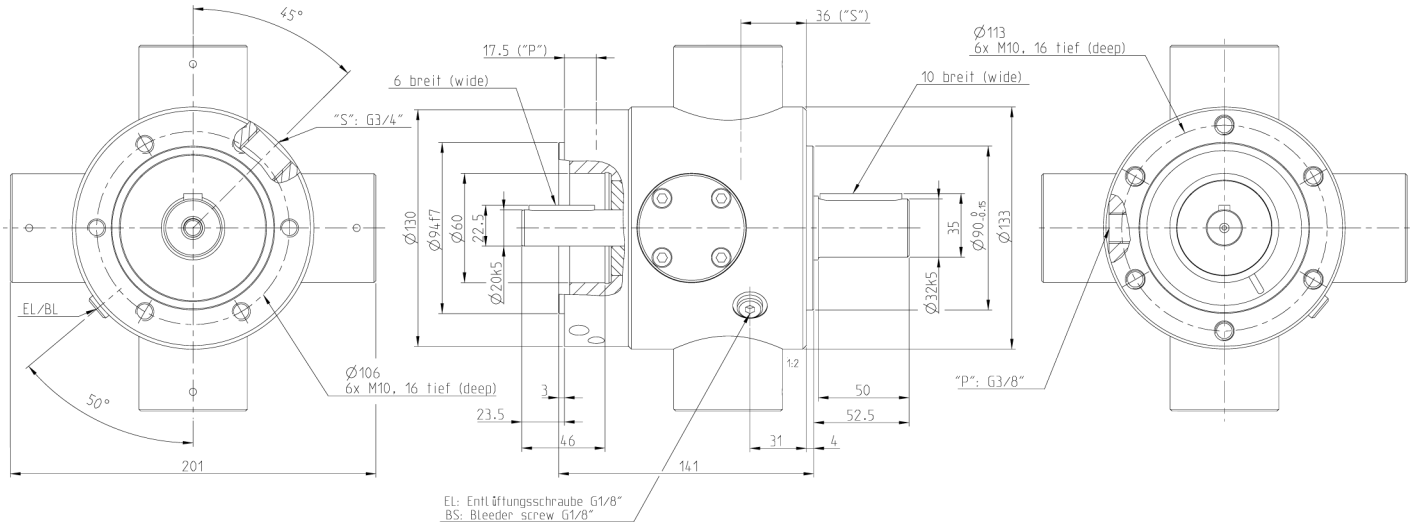

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,59	1,1	700 (1000)	9	P(S)/04-700(1000)-1,10 / I
2,83	1,95	700 (1000)	9	P(S)/04-700(1000)-1,95 / I
3,58	2,47	700 (1000)	9	P(S)/04-700(1000)-2,47 / I
4,42	3,05	700	9	P/04-700-3,05 / I
6,36	4,39	700	9	P/04-700-4,39 / I
11,31	7,8	500	9	P/04-500-7,80 / I


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.


All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

Assembly P/04.../GP2, PS/04.../GP2

for direct mounting a gear pump type GP2D...F (See page 45)

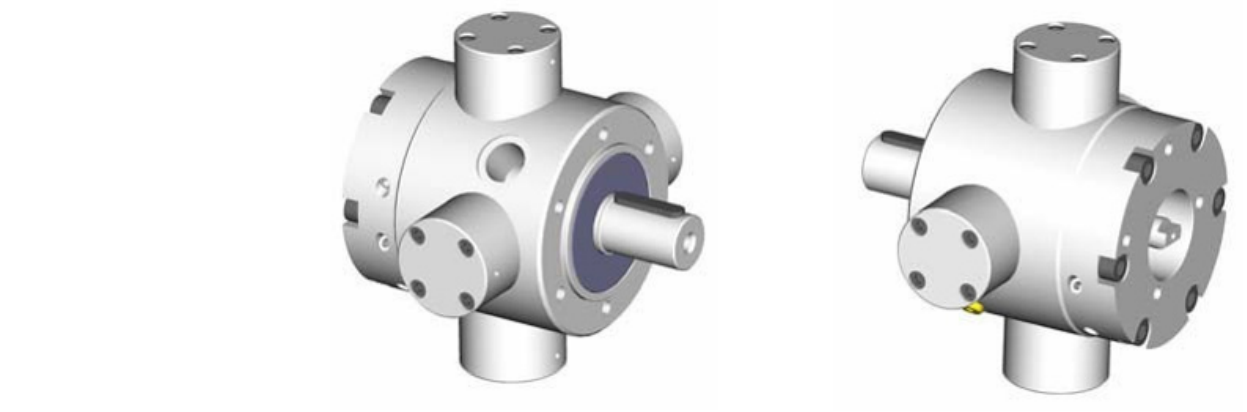

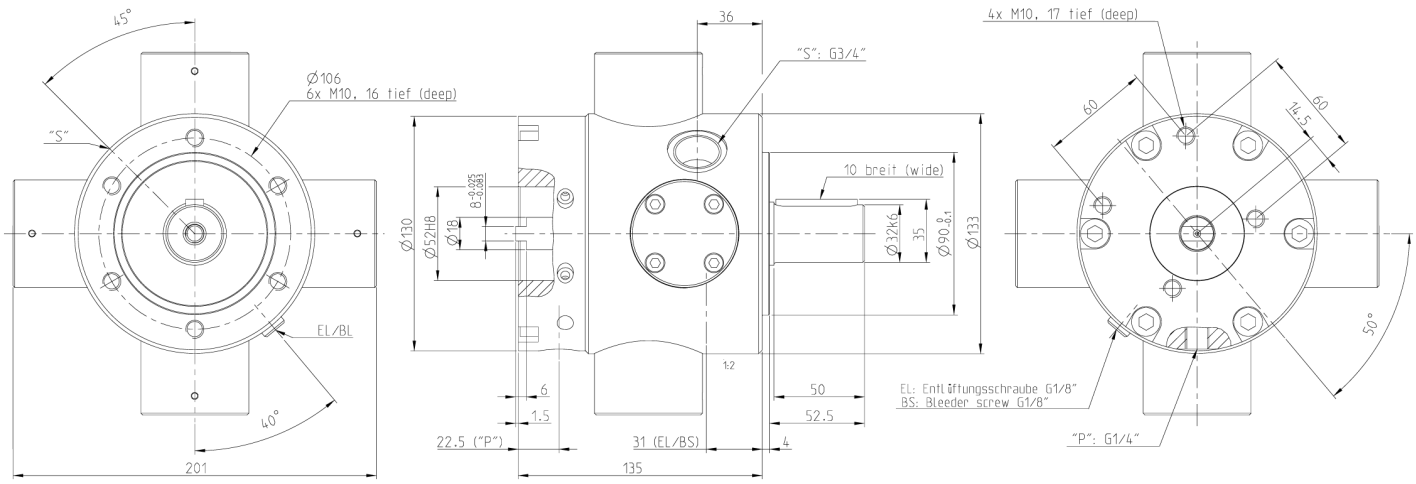


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
1,59	1,1	700 (1000)	9	P(S)/04-700(1000)-1,10/GP2
2,83	1,95	700 (1000)	9	P(S)/04-700(1000)-1,95/GP2
3,58	2,47	700 (1000)	9	P(S)/04-700(1000)-2,47/GP2
4,42	3,05	700	9	P/04-700-3,05/GP2
6,36	4,39	700	9	P/04-700-4,39/GP2
11,31	7,8	500	9	P/04-500-7,80/GP2


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.

All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

Assembly P/06.../I, PS/06.../I

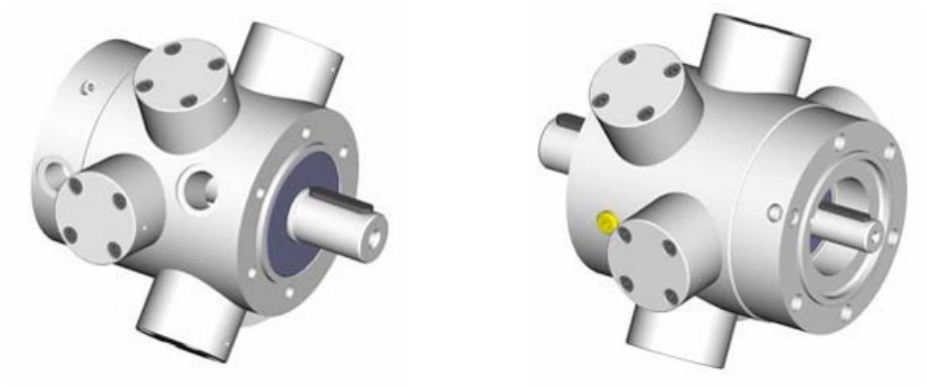

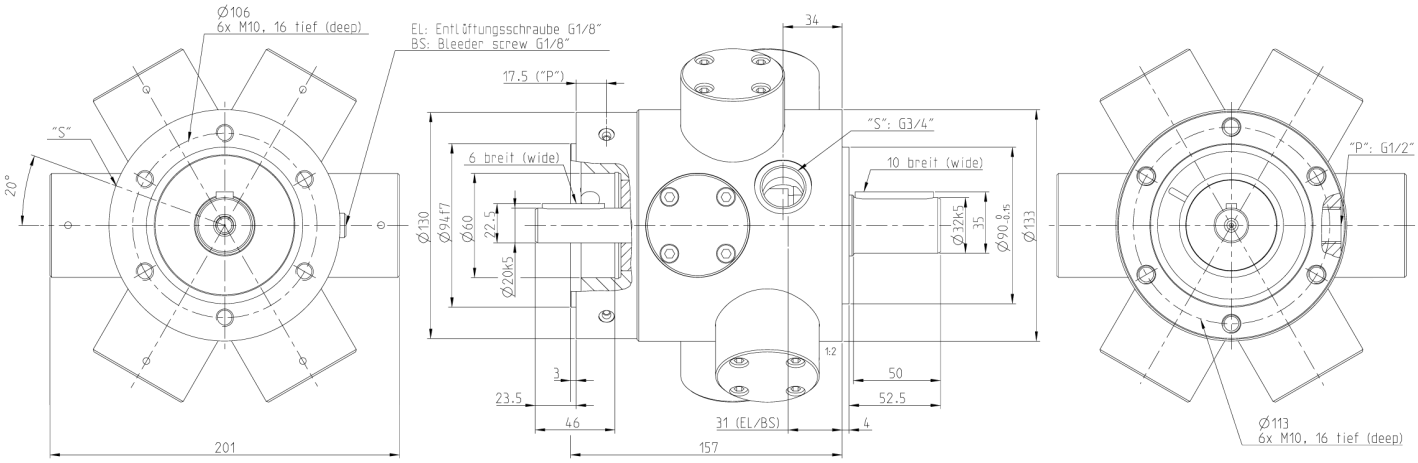

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
2,38	1,64	700 (1000)	8,9	P(S)/06-700 (1000)-1,64 / I
4,25	2,93	700 (1000)	8,9	P(S)/06-700 (1000)-2,93 / I
5,37	3,7	700 (1000)	8,9	P(S)/06-700 (1000)-3,70 / I
6,63	4,57	700	8,9	P/06-700-4,57 / I
9,54	6,58	700	8,9	P/06-700-6,58 / I
16,97	11,7	500	8,9	P/06-500-11,70 / I


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.


All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.


More combination options see appendix or configurator.

Assembly P/06.../GP2, PS/06.../GP2

for direct mounting a gear pump type GP2D...F (See page 45)

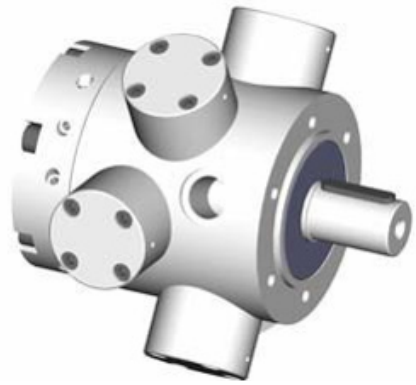

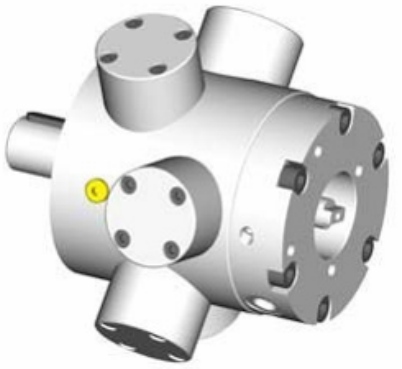

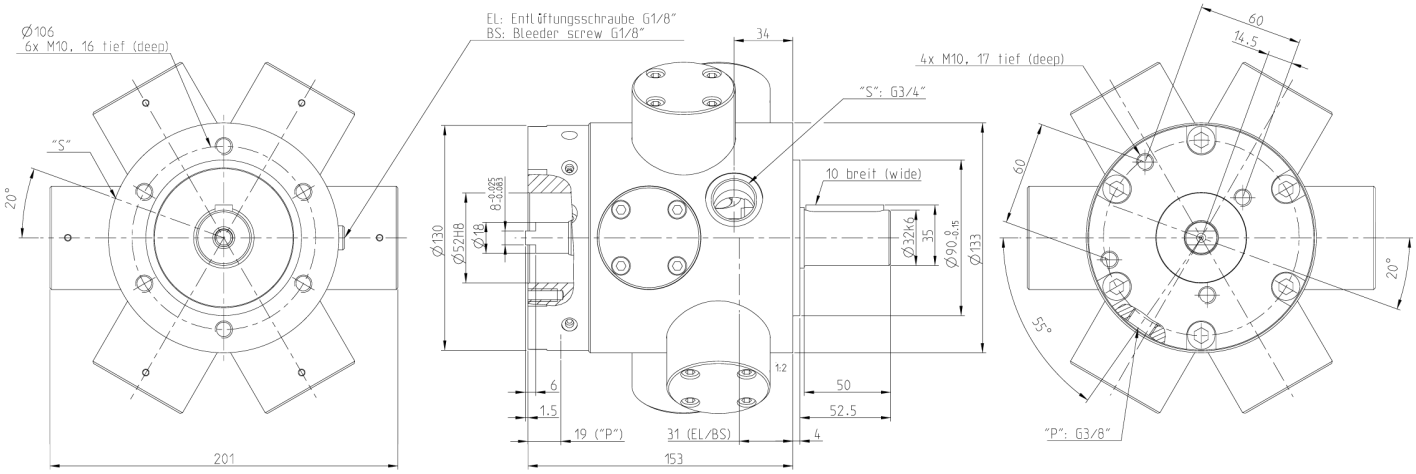


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
2,38	1,64	700 (1000)	8,9	P(S)/06-700 (1000)-1,64/GP2
4,25	2,93	700 (1000)	8,9	P(S)/06-700 (1000)-2,93/GP2
5,37	3,7	700 (1000)	8,9	P(S)/06-700 (1000)-3,70/GP2
6,63	4,57	700	8,9	P/06-700-4,57/GP2
9,54	6,58	700	8,9	P/06-700-6,58/GP2
16,97	11,7	500	8,9	P/06-500-11,70/GP2


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.

All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

Assembly PW/04.../I

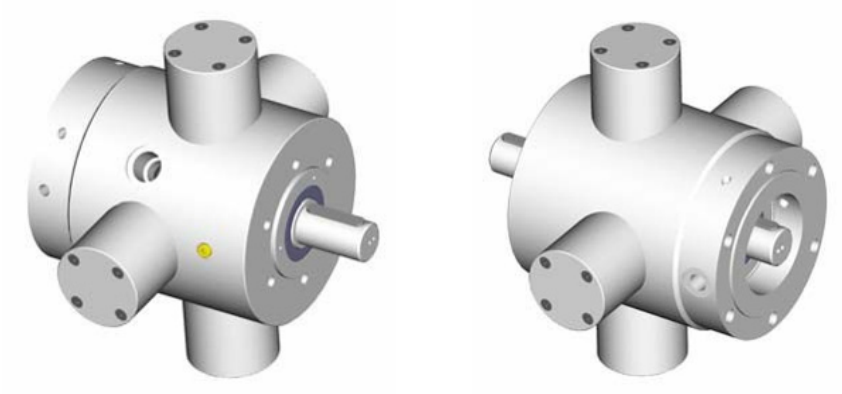

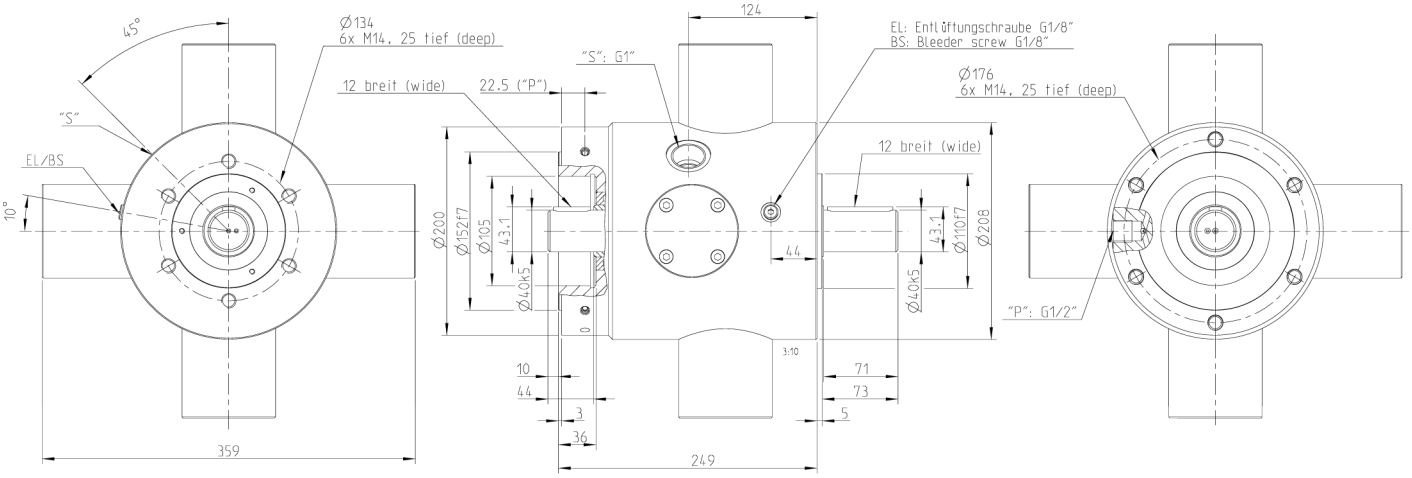


Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
23,93	16,5	500	39	PW/04-500-16,50 / I
28	19,31	500	39	PW/04-500-19,31 / I
32,08	22,12	500	39	PW/04-500-22,12 / I


A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.

All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

Assembly PW/06.../I

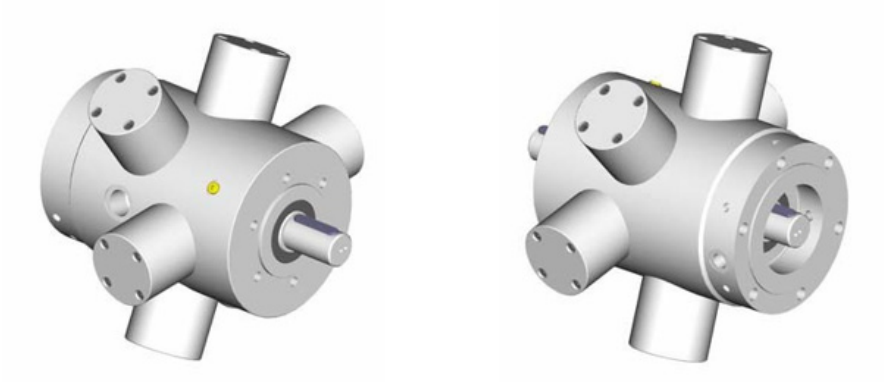

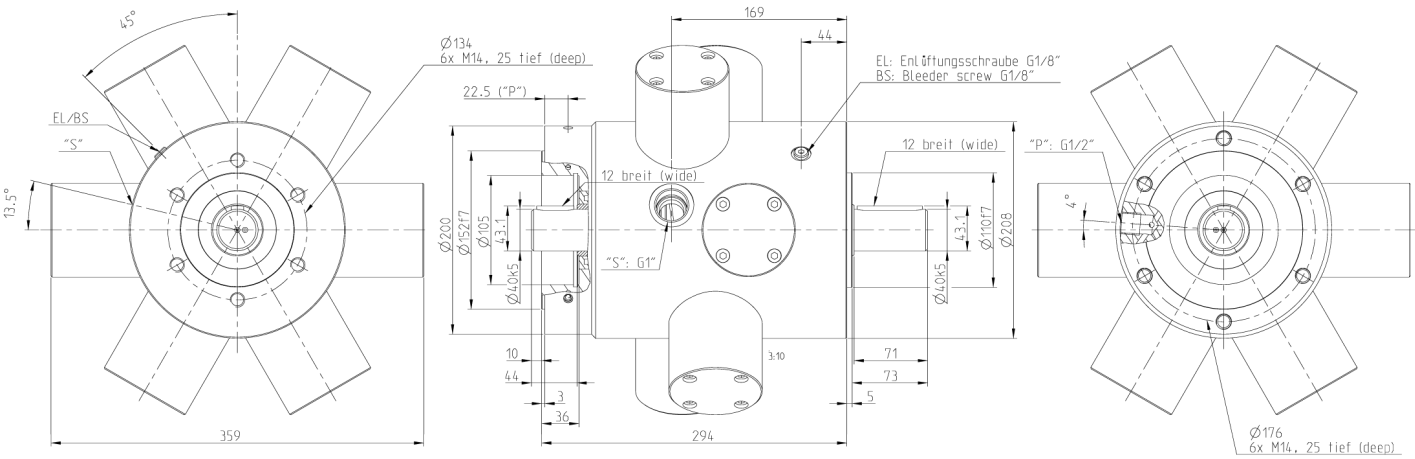

Q_{theor} [l/min] (at 1450 rpm)	Vg [cm³/rev]	Pmax. [bar]	m [kg]	Pump designation
35,89	24,75	500	48	PW/06-500-24,75 / I
42	28,97	500	48	PW/06-500-28,97 / I
48,12	33,19	500	48	PW/06-500-33,19 / I

A volume flow differing from the actual values in the charts can be realized by using different piston diameters and/or special strokes.


All pumps are deliverable with several pressure connections as well as with different delivery flows per each pressure connection. Further information upon request.

More combination options see appendix or configurator.

6.3 GEAR PUMPS

Assembly GP1D..G


(second shaft end type GP1 of the radial piston pump is required)

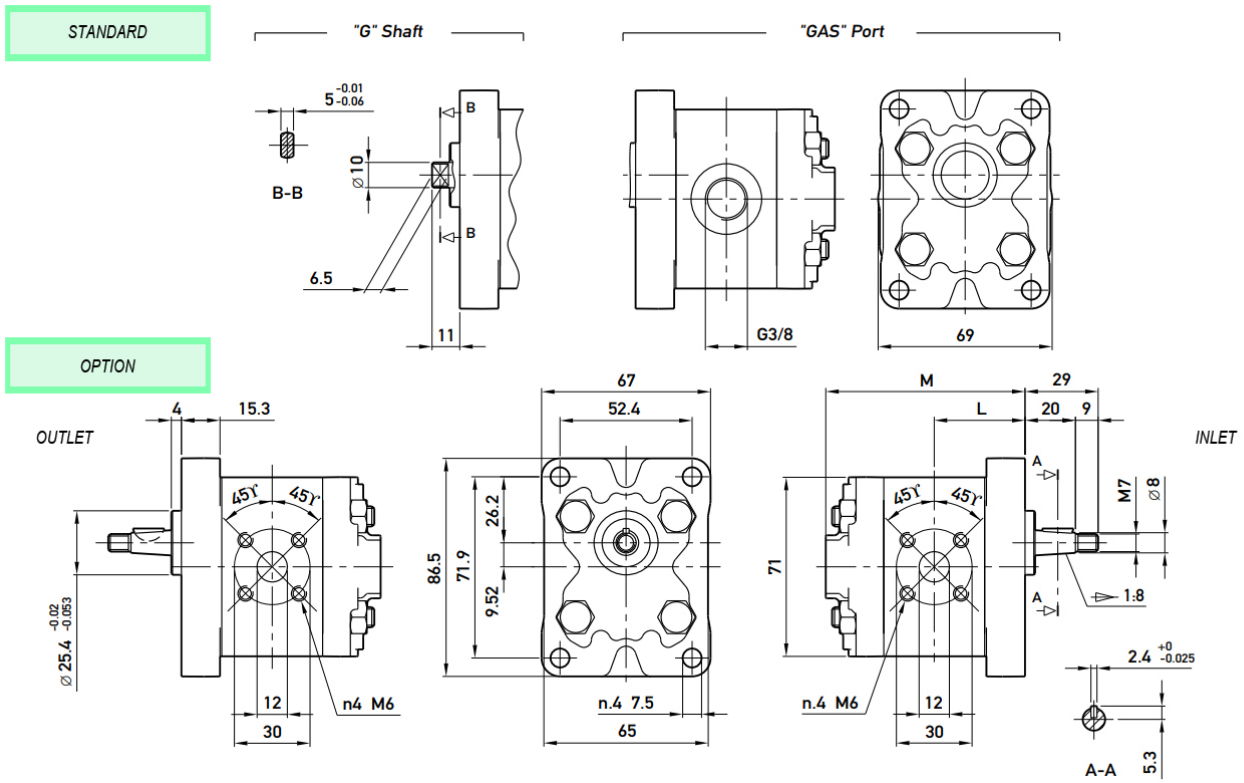

Type	Displace-ment	Flow at 1500rev/ min	MAX Pressure			Max speed	Dimensions	
			P1	P2	P3		L	M
	cm³/rev	Litres/min	bar	bar	bar	rpm	mm	mm
GP1D11G	1,1	1,6	230	250	270	6000	34	75
GP1D13G	1,3	2	230	250	270	6000	34,5	76
GP1D16G	1,6	2,4	230	250	270	6000	35	77
GP1D21G	2,1	3,2	230	250	270	6000	36	79
GP1D27G	2,7	4	230	250	270	6000	37	81
GP1D32G	3,2	4,8	210	230	250	5000	38	83
GP1D37G	3,7	5,6	210	230	250	4500	39	85
GP1D42G	4,2	6,4	210	230	250	4000	40	87
GP1D48G	4,8	7,2	190	210	230	3500	41	89
GP1D58G	5,8	8,7	190	210	230	3000	43	93
GP1D80G	8	11,9	160	180	200	2100	47	101

Assembly GP2D..F


(second shaft end type GP2 of the radial piston pump is required)

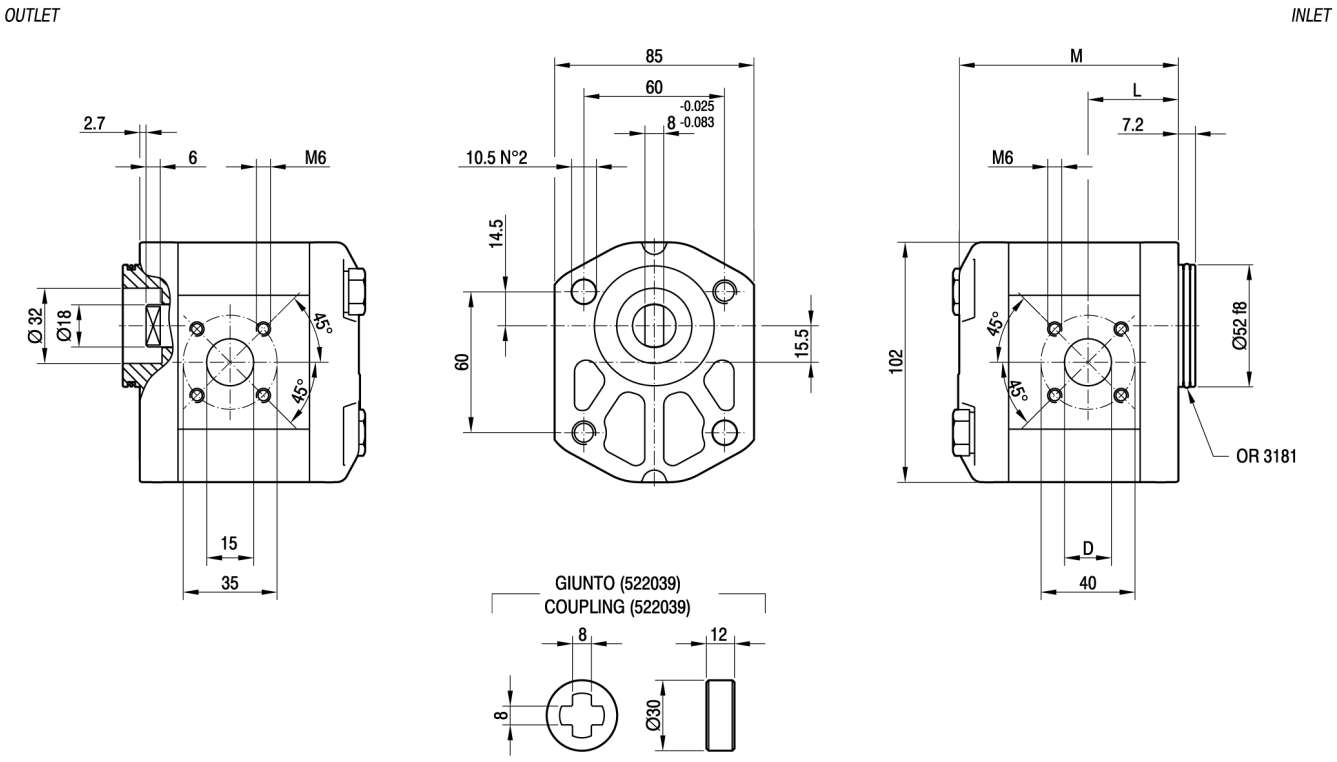

Type	Displace-ment	Flow at 1500rev/ min	MAX Pressure			Max speed	Dimensions	
			P1	P2	P3		L	M
	cm³/rev	Litres/min	bar	bar	bar	rpm	mm	mm
GP2D045F	4,5	6,4	250	270	290	4000	37,3	91
GP2D064F	6,4	9,1	250	270	290	4000	38,5	94
GP2D070F	7	10	250	270	290	4000	44,8	95
GP2D083F	8,3	11,8	250	270	290	4000	45,8	97
GP2D096F	9,6	13,7	250	270	290	4000	40,6	99
GP2D115F	11,5	16,4	230	250	270	4000	45	102
GP2D141F	14,1	20,1	2303	250	270	4000	45	106
GP2D160F	16	22,8	210	225	240	4000	45	109
GP2D179F	17,9	25,5	210	225	240	4000	53,3	112
GP2D211F	21,1	30,1	180	195	210	3400	45	117
GP2D237F	23,7	33,7	180	195	210	3000	52,5	121
GP2D255F	25,5	36,4	170	185	200	2600	59,3	124
GP2D282F	28,2	40,1	170	185	200	2600	61,3	128

Assembly GP3D

(second shaft end type I of the radial piston pump is required)

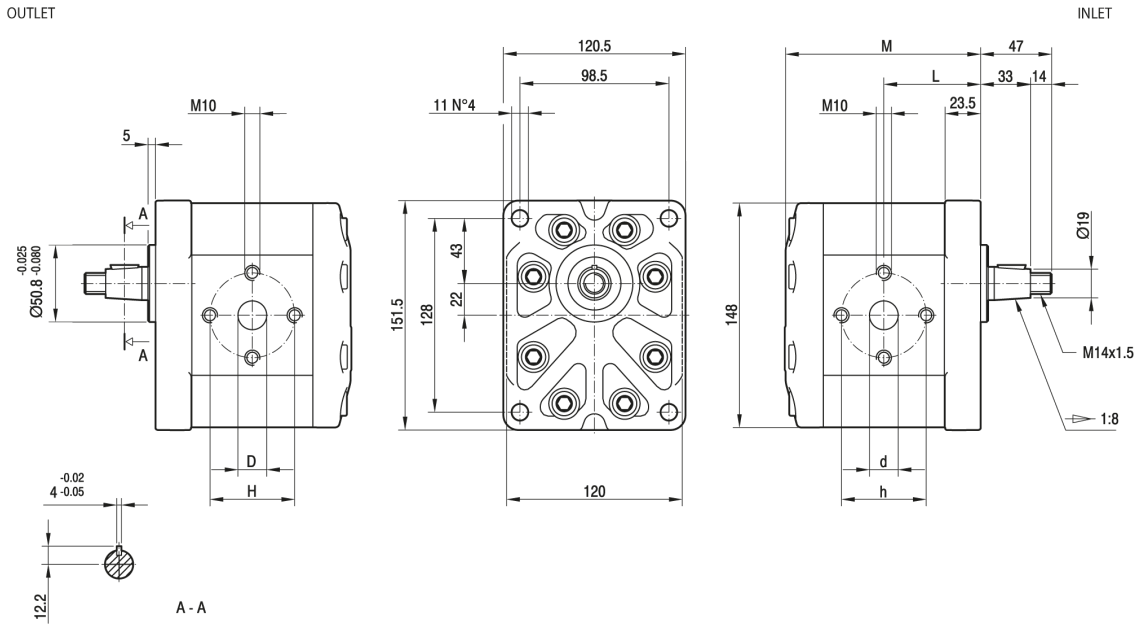

Type	Displace-ment	Flow at 1500rev/ min	MAX Pressure			Max speed	Dimensions			
			P1	P2	P3		L	M	h	H
	cm³/rev	Litres/ min	bar	bar	bar	rpm	mm	mm	mm	mm
GP3D200F	20	29	230	250	270	3500	64	129,5	56	56
GP3D220F	22	31	230	250	270	3500	64,5	130,5	56	56
GP3D260F	26	37	230	250	270	3000	66	133,5	56	56
GP3D330F	33	48	230	250	270	3000	68,5	138,5	56	56
GP3D390F	39	56	220	240	260	3000	70,5	142,5	56	56
GP3D440F	44	62	210	230	250	2800	72	145,5	51	51
GP3D520F	52	74	200	215	230	2400	75	151,5	56	56
GP3D610F	61	87	190	205	220	2800	78	157,5	62	51
GP3D710F	71	101	170	185	200	2500	81,5	164,5	62	51
GP3D780F	78	112	160	175	190	2300	84	169,5	62	51
GP3D870F	87	124	140	155	170	2000	87	175,5	62	51

Hydroserv bv - Industrielaan 37A - 9320 Erembodegem - Belgium
Email: info@hydroserv.eu - contact@wimmerpumps.com
Tel: +32 (0) 53 71 12 12

HYDRAULICS WITH SERVICE

HYDROSERV

WIMMER PUMPS

Hydroserv bv
Industrielaan 37 A
9320 Erembodegem - Aalst
Belguim

+ 32 (0)53 71 12 12

contact@wimmerpumps.com
info@hydroserv.eu

www.WIMMERPUMPS.com
www.HYDROSERV.eu

